


# TC-D5PROII

## SERVICE MANUAL

7090  
US Model  
E Model

# Original

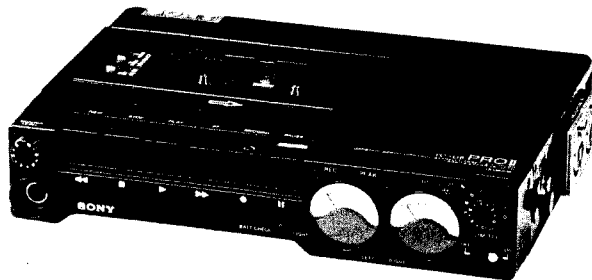

### SPECIFICATIONS

Recording system	4-track 2-channel stereo	Outputs	Two line outputs (phono jacks): Output level 0.44 V at load impedance 47 kilohms (Output impedance: less than 4.7 kilohms) Headphones jack (stereo phone jack): Maximum output level 20 mW + 20 mW at 10% harmonic distortion, at load impedance 8 ohms (For headphones from 8 to 300 ohms)
Fast winding time	Approx. 150 sec with Sony C-60 cassette	Speaker	Approx. 5 cm (2 inches) diameter
Bias frequency	85 kHz	Power output	200 mW (at 10% harmonic distortion) at DC operation
Signal-to-noise ratio	DOLBY NR OFF Type III (FeCr) cassette: 58dB at peak level (NAB) Type II (CrO <sub>2</sub> ) cassette: 56dB at peak level (NAB) Type I (Normal) cassette: 55dB at peak level (NAB) DOLBY NR ON Type III (FeCr) cassette: 64dB at peak level (NAB) Type II (CrO <sub>2</sub> ) cassette: 62dB at peak level (NAB) Type I (Normal) cassette: 61dB at peak level (NAB)	Supplied accessories	Connecting cord (1) Carrying case (1) Shoulder belt (1) Belt (1)
Total harmonic distortion	0.9% at 315Hz (Type II cassette)		<b>0dB = 0.775 V</b>
Frequency response	Type III (FeCr) cassette: 40—16000Hz (± 3dB) Type II (CrO <sub>2</sub> ) cassette: 40—15000Hz (± 3dB) Type I (Normal) cassette: 40—14000Hz (± 3dB)		— Continued on page 2 —
Wow and flutter	0.06% WRMS (NAB) ± 0.17% (DIN)		'Dolby' and the double-D symbol are the trade marks of Dolby Laboratories Licensing Corporation. Noise reduction system manufactured under license from Dolby Laboratories Licensing Corporation.
Inputs	Two microphone input connectors (XLR-3-31 type, balanced) Sensitivity 0.28 mV, for low impedance microphones		



# STEREO CASSETTE-CORDER

# SONY®

## GENERAL

Power requirements	3V DC, Two IEC designation R20 (size D) batteries External power input jack: required voltage 6V: from optional AC power adaptor AC-D468 from 12V car battery with optional DCC-127A car battery cord
Battery life	Approx. 2.5 hours of continuous recording using Sony SUM-1(NS) New Super Batteries Approx. 4.5 hours of continuous recording using Sony AM1 Alkaline Batteries
Dimensions	Approx. 242 x 48 x 168 mm (w/h/d) (9 <sup>5</sup> / <sub>8</sub> x 1 <sup>15</sup> / <sub>16</sub> x 6 <sup>5</sup> / <sub>8</sub> inches) including projecting parts and controls
Weight	Approx. 1.7 kg (3 lb 12 oz) including batteries

## FEATURES

CANNON XLR female microphone input connectors for balanced inputs.

MIC ATT switch for successful recording of very loud sources.

LIMITER switch prevents saturation of the tape by very high transient input peaks.





Two illuminated VU meters and LED PEAK indicator allow accurate monitoring of both average and transient input levels.

## CONTENTS


SECTION 1 DISASSEMBLY .....	P. 3
SECTION 2 OUTLINE .....	P. 6
2-1. BLOCK DIAGRAM .....	P. 6
2-2. MECHANICAL OPERATION .....	P. 8
SECTION 3 DIAGRAMS .....	P. 9
3-1. MOUNTING DIAGRAM .....	P. 9
3-2. SCHEMATIC DIAGRAM .....	P.13
SECTION 4 ADJUSTMENT .....	P.16
4-1. MECHANICAL ADJUSTMENT .....	P.16
4-2. ELECTRICAL ADJUSTMENT .....	P.18
SECTION 5 EXPLODED VIEWS .....	P.22
SECTION 6 ELECTRICAL PARTS LIST .....	P.29

**SECTION 1  
DISASSEMBLY**


**Note:** Follow the disassembly procedure in the numerical order given.

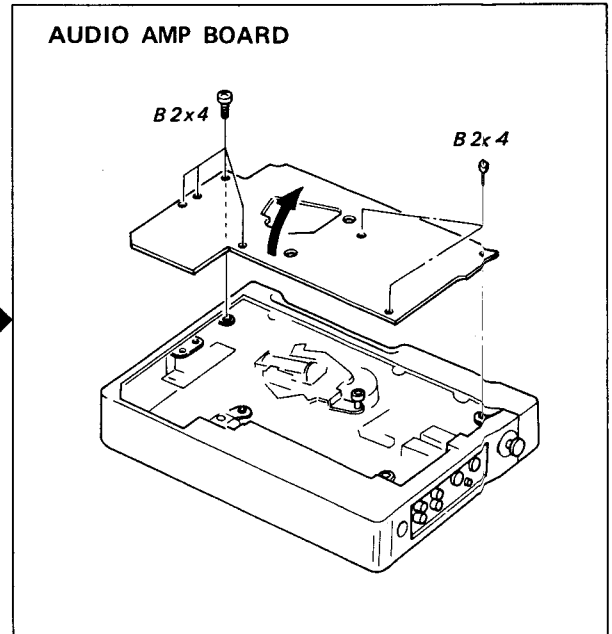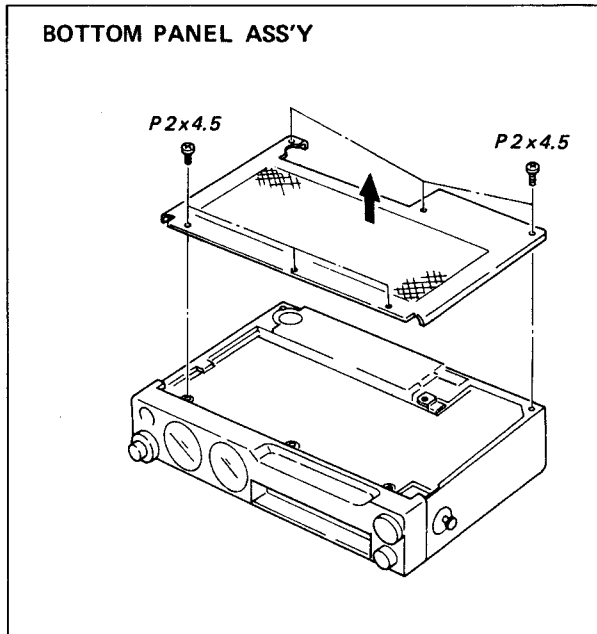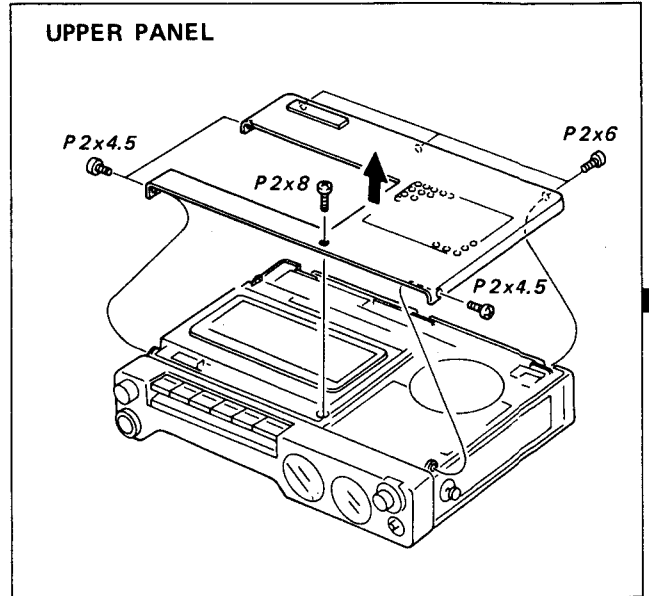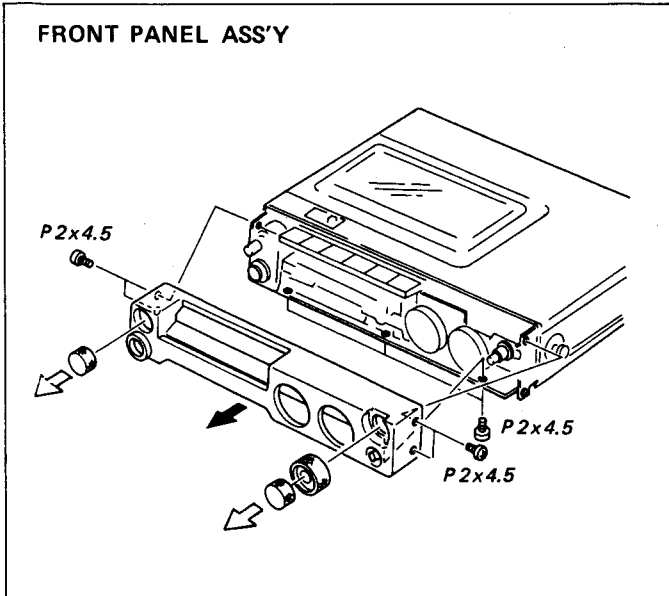


CASSETTE LID ASS'Y, STABILIZER BOARD

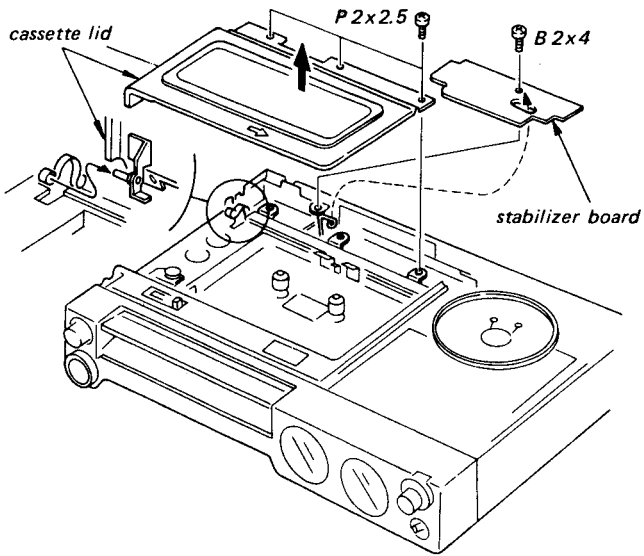


REC BOARD

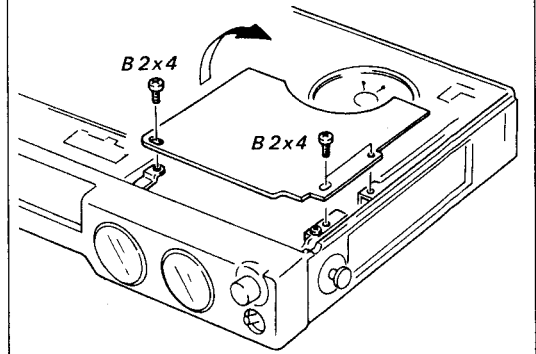




MECHANISM ASS'Y

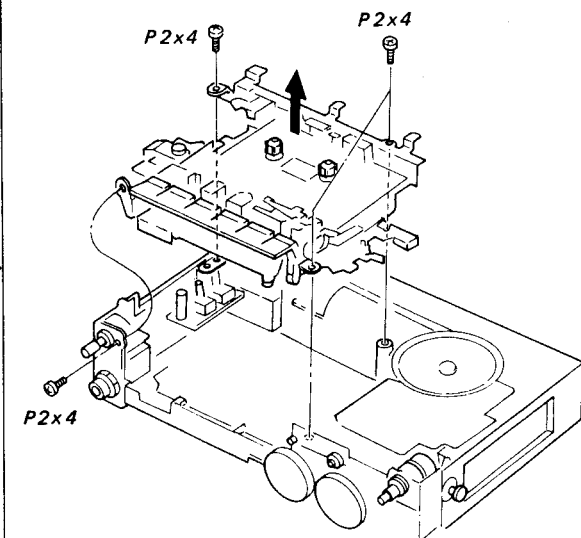


ORNAMENTAL FRAME

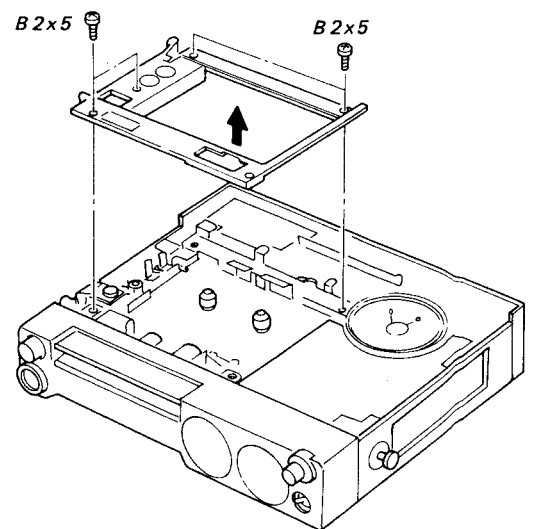

SECTION 2  
OUTLINE

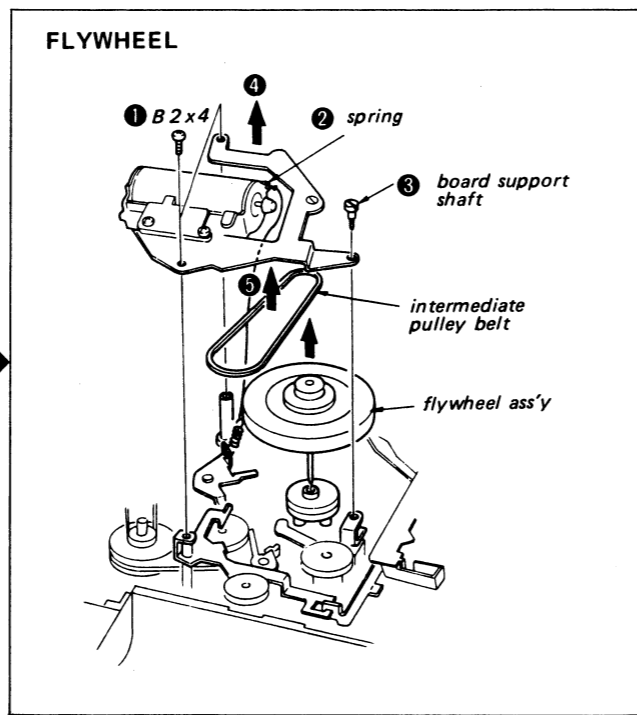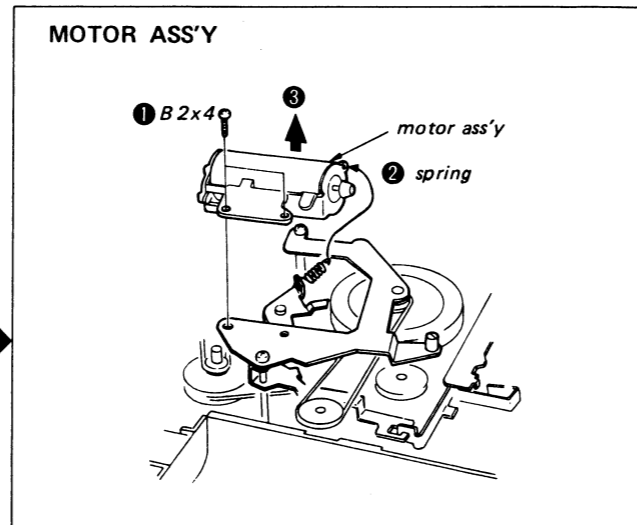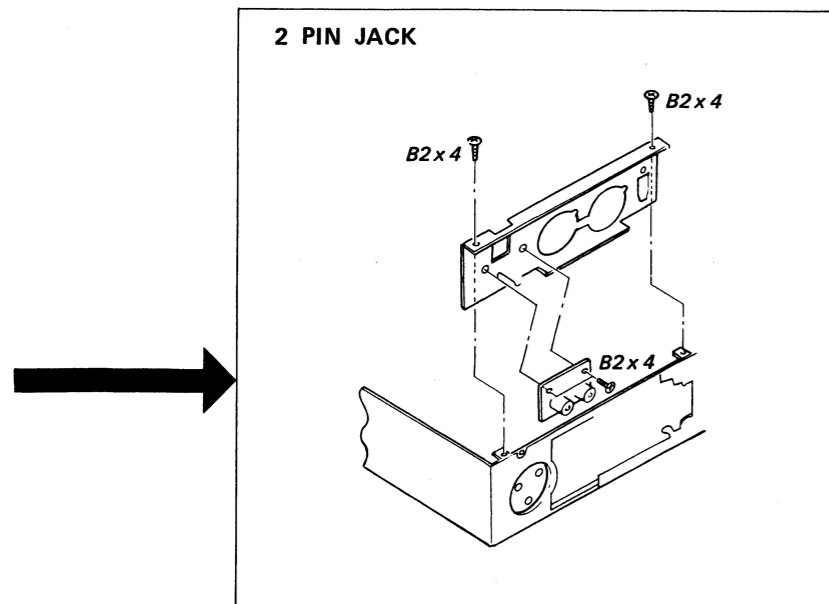

2-1. BLOCK DIAGRAM

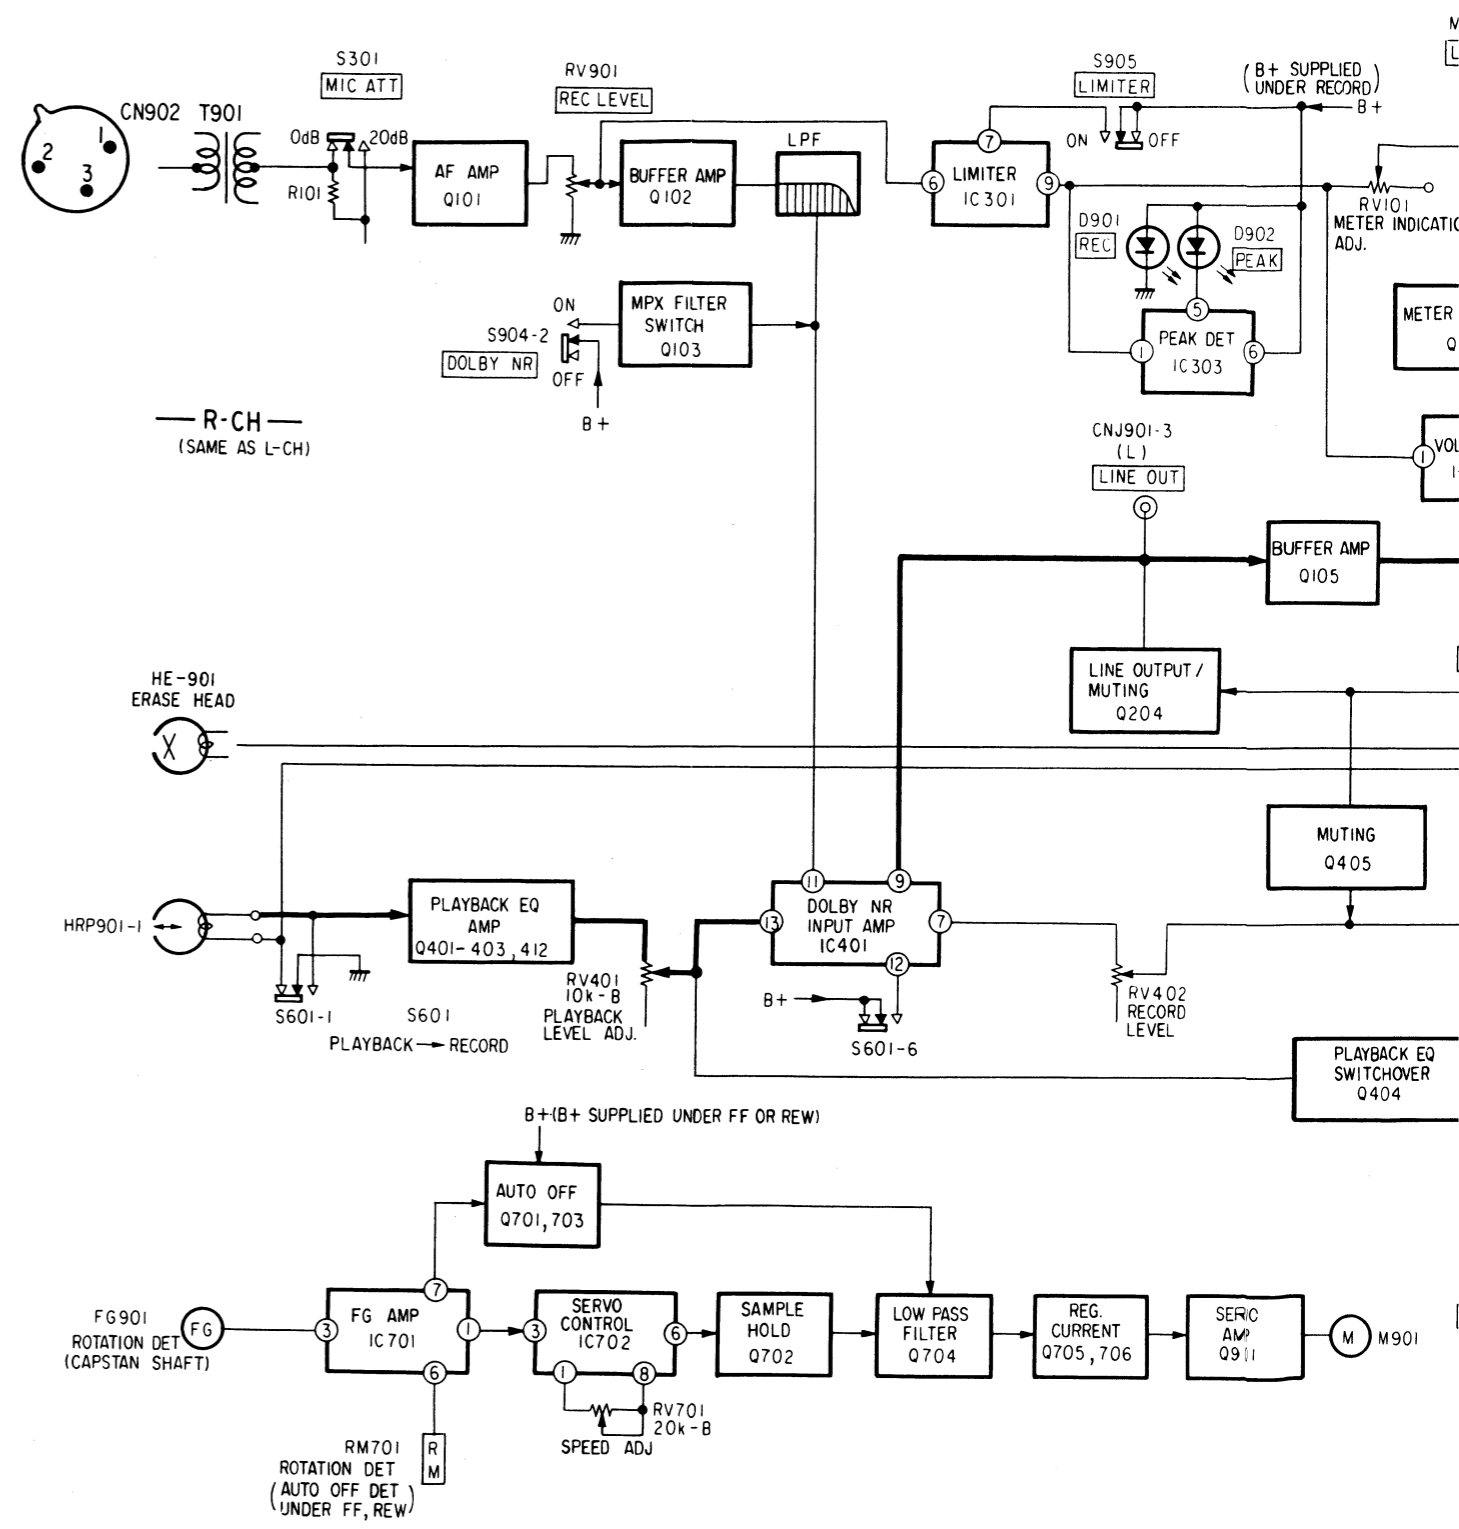



2-2. MECHANICAL OPERATION

• Disc Drive System

An elastic rubber coating is applied to the flywheel and the motor pulley is pressed directly against this rubber coating to drive the flywheel. The compliance of this elastic materials and the inertial mass of the flywheel together function as a mechanical filter, to eliminate any flutter components above approximately 100 Hz. Motor torque increases in inverse proportion to wheel. Meanwhile, since the inertial mass of the flywheel itself is low, excellent start-up characteristics (The time from start-up to rated speed is less than 0.2 sec) and anti-rolling effect are obtained.


• Capstan Servo Control Mechanism

The speed is detected through the flywheel which is directly coupled to the capstan, to apply the servo control. As shown in Fig. 1-1, the bearing assembly comprises a bias magnet, coil, and startor. The flywheel has a rotor and the coil senses fluctuations in magnetic flux caused by variations in the air gap between the rotor and the stator, to generate the servo control frequencies. This serves to remove any wow components from 10Hz down to the vicinity of DC, to improve the anti-rolling effect.

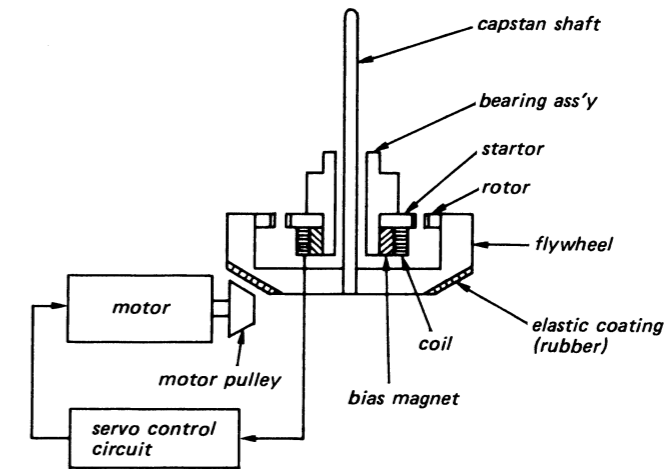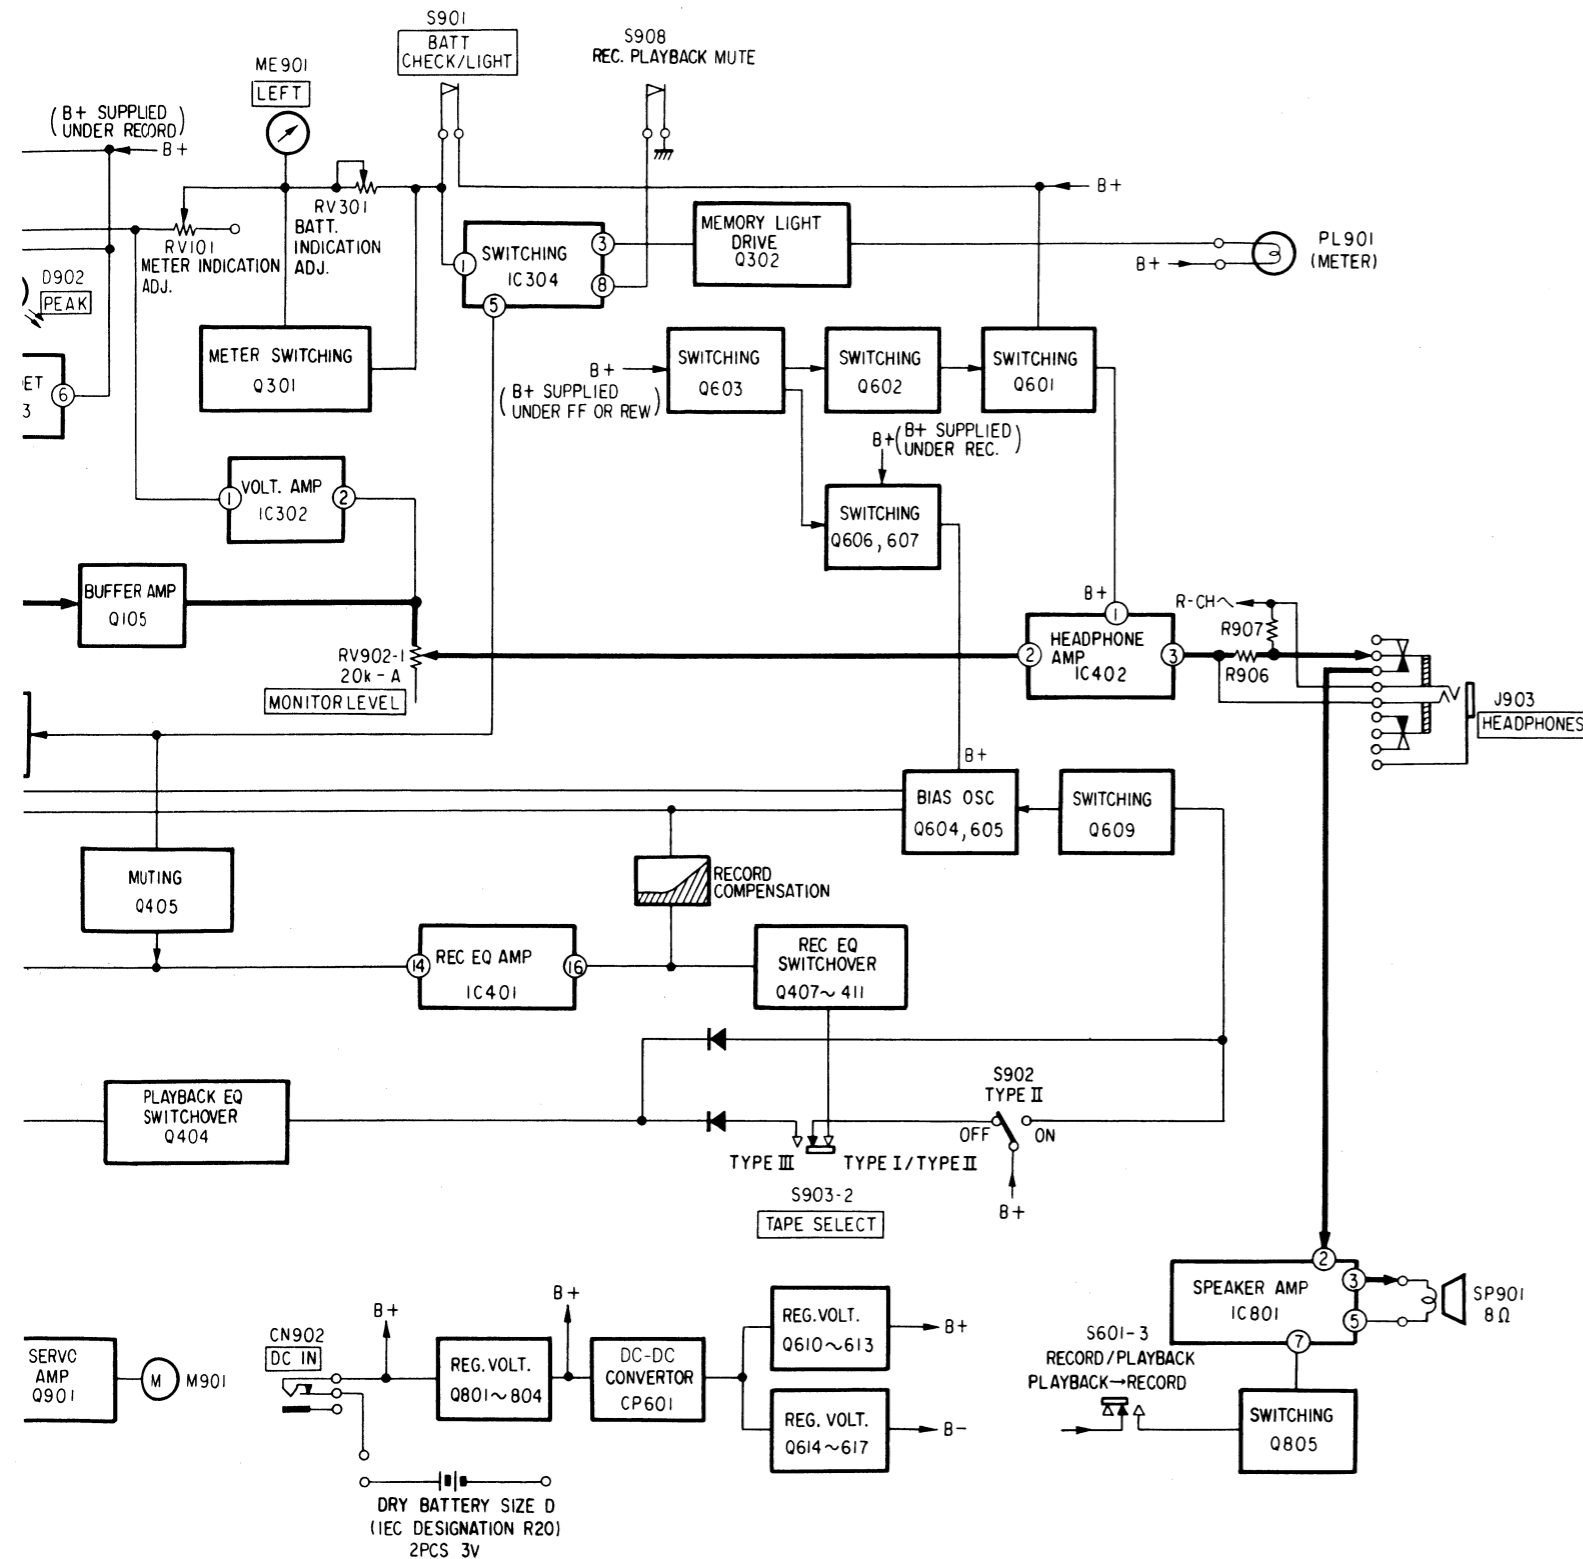

SECTION 3  
DIAGRAMS


Semiconductor Lead Layouts

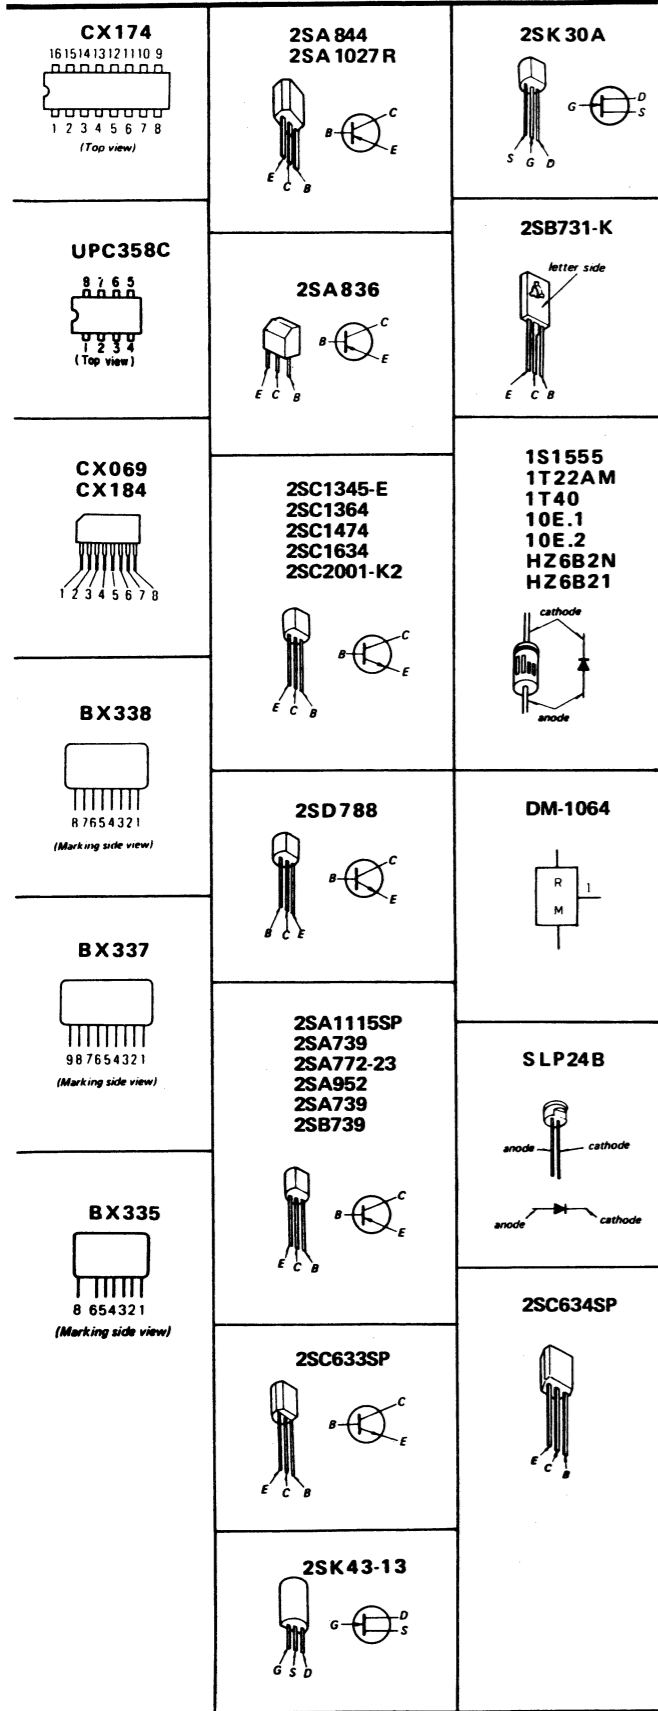


3-1. MOUNTING DIAGRAM

A  
B  
C  
D  
E  
F  
G  
H  
I  
J

- Note:
- : parts extracted from the component side.
  - : parts extracted from the conductor side.
  - : part mounted on the conductor side.
  - : signal path
  - : L-CH signal path
  - : R-CH signal path
  - : Color code of sleeving over the end of the jacket.



D	Q, IC
901	IC303 BX338
205	IC304 BX335
105	IC302
104	IC304
201	IC304
201	IC304
301	IC304
101	IC303
202	IC303
103	IC301
901	IC301
902	IC301
D	Q, IC

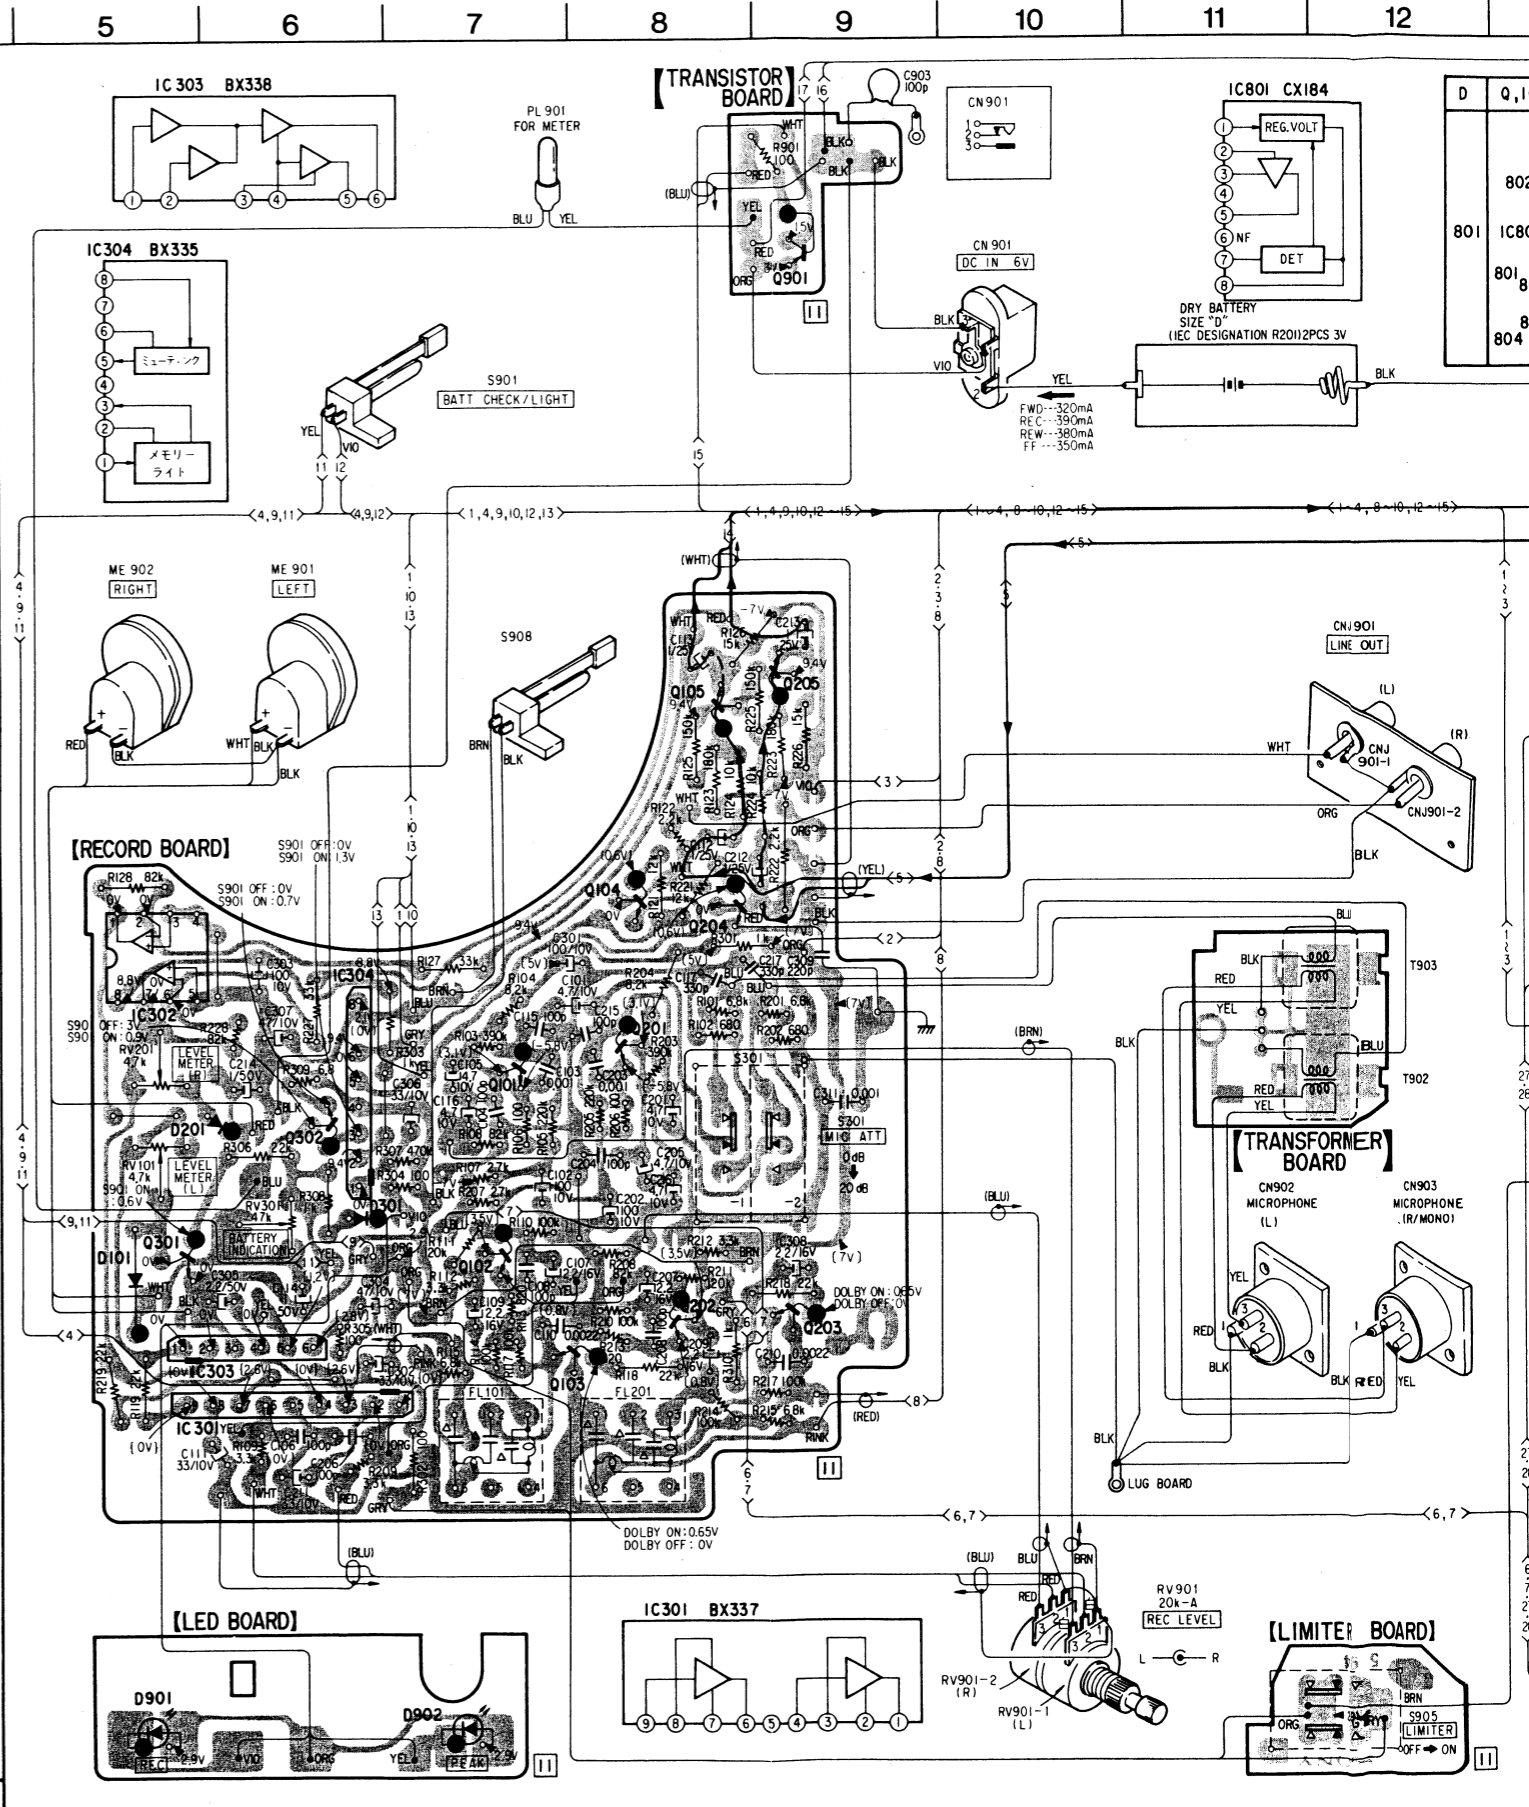




TC-D5PRO II TC-D5PRO II

12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27


A  
B  
C  
D  
E  
F  
G  
H  
I  
J

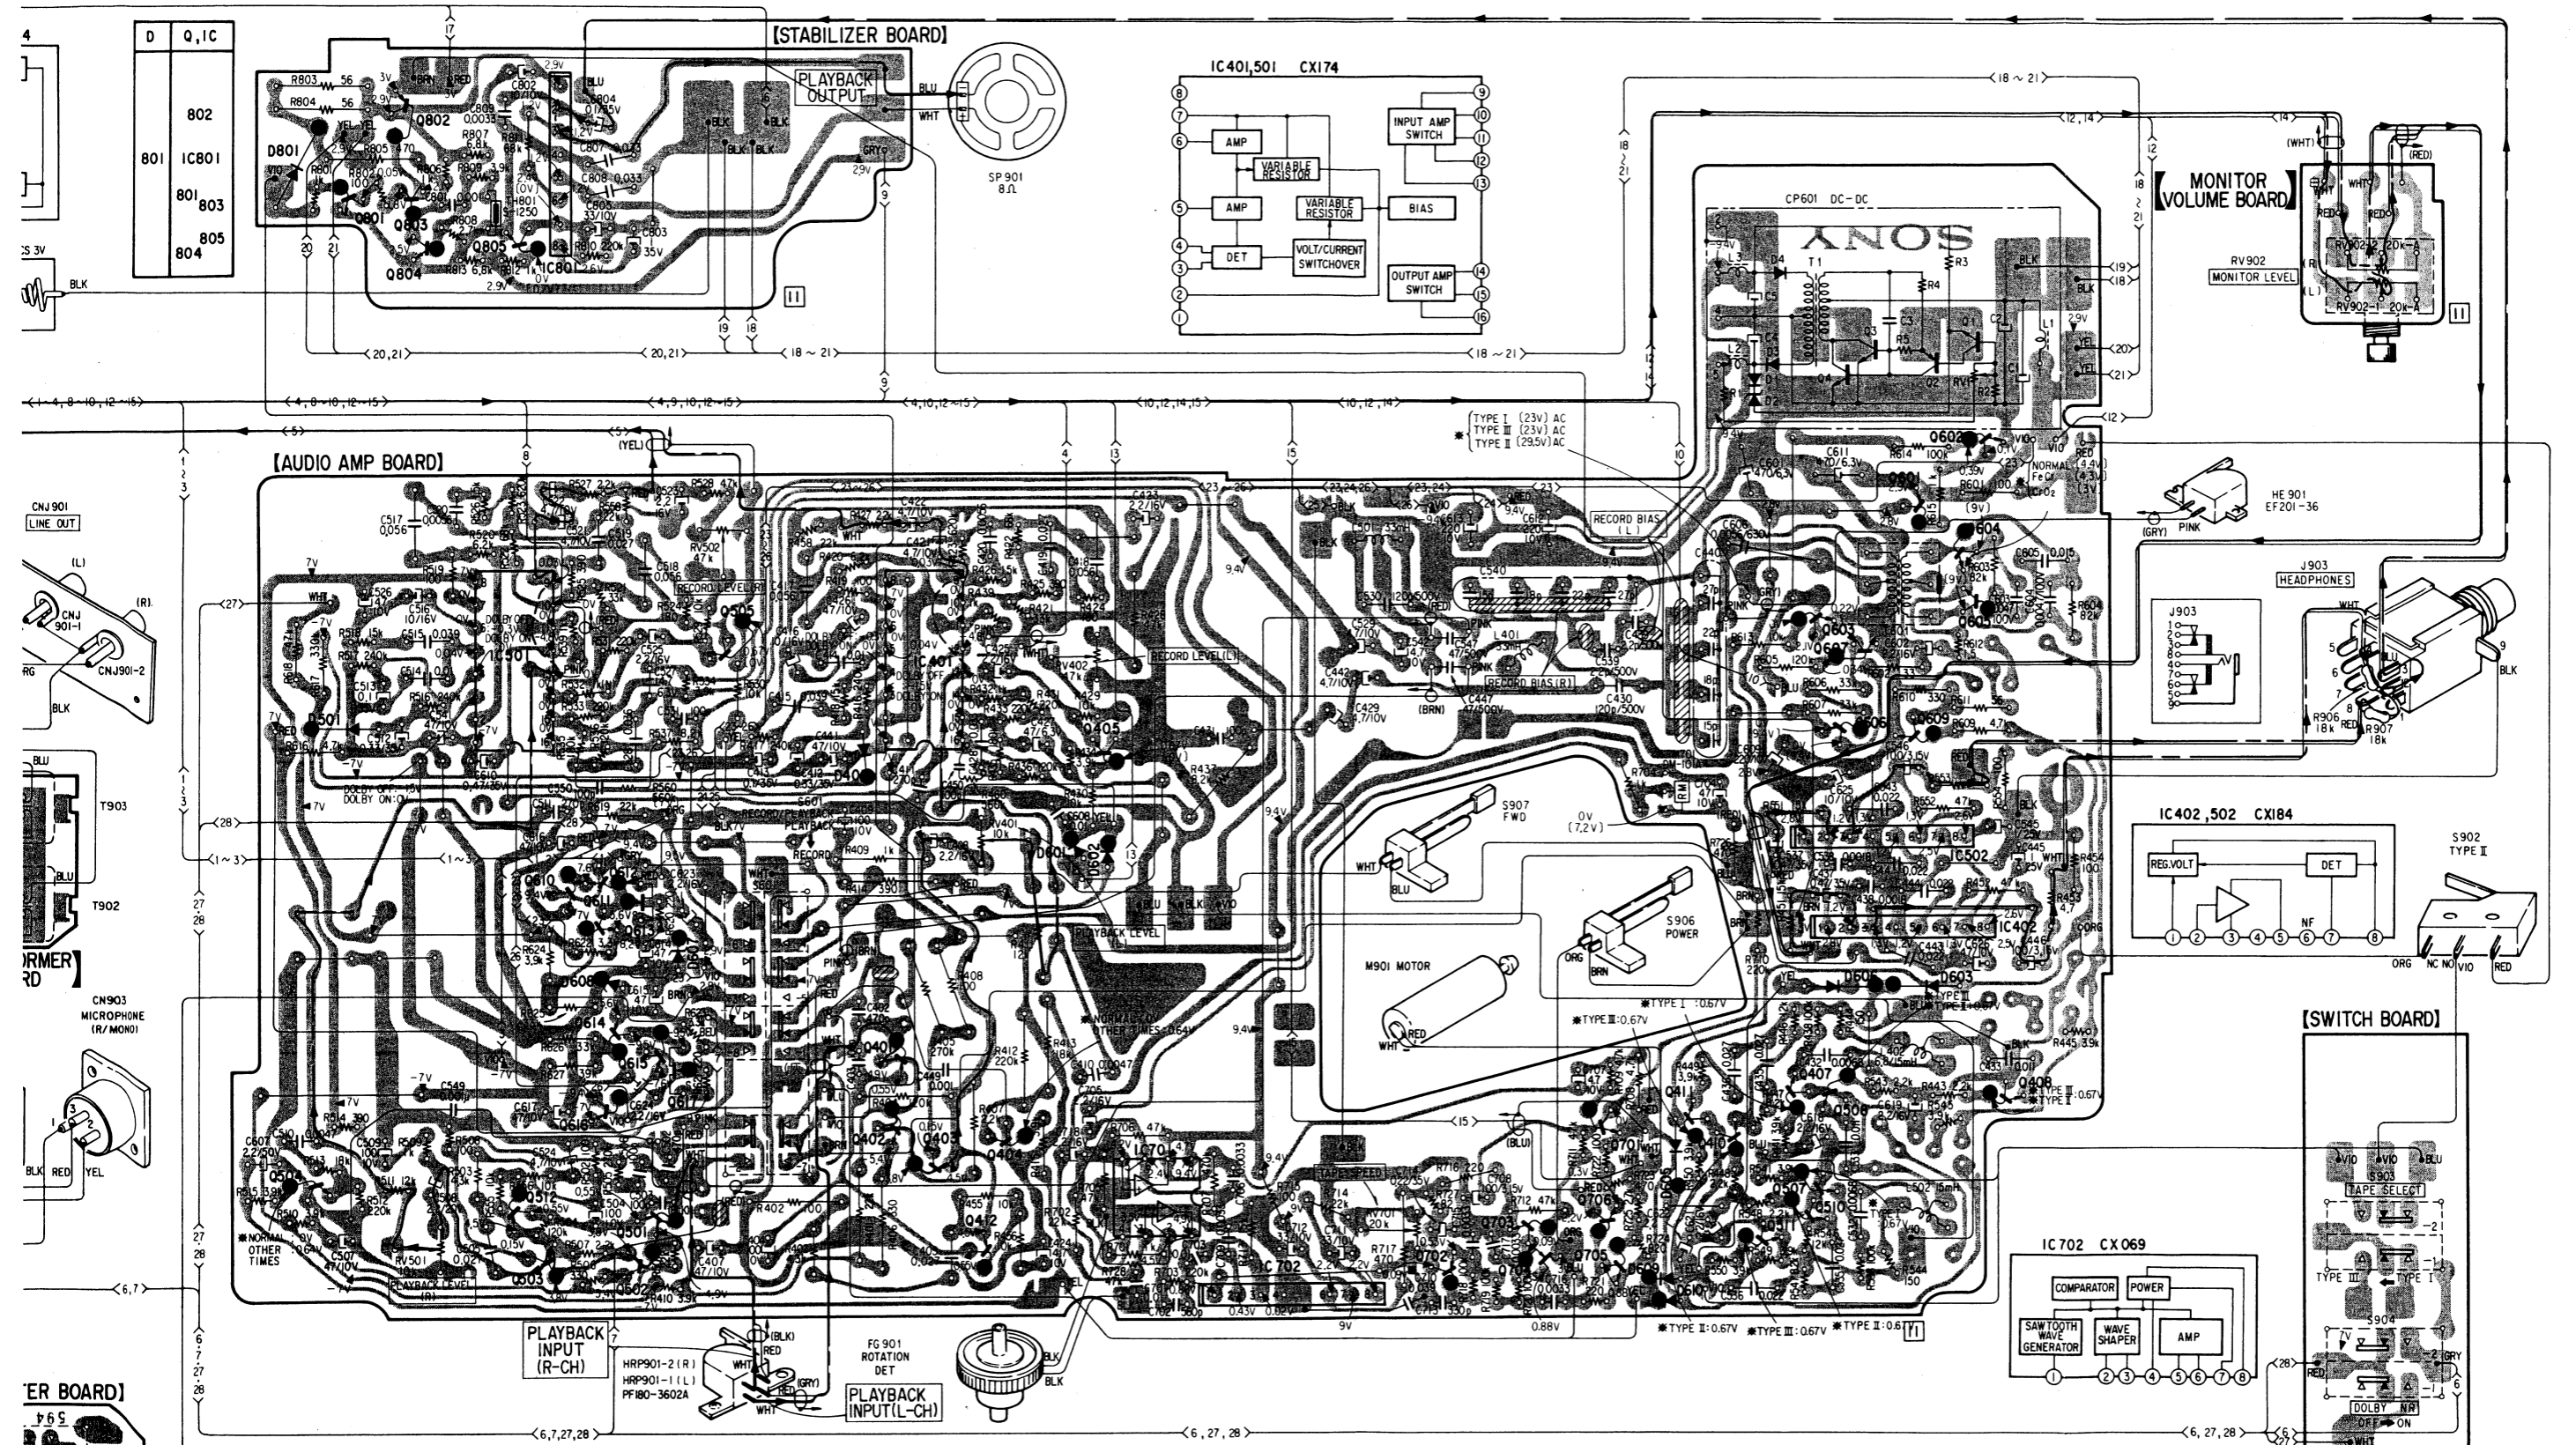

Q	IC	504	501	502	503	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000
---	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------





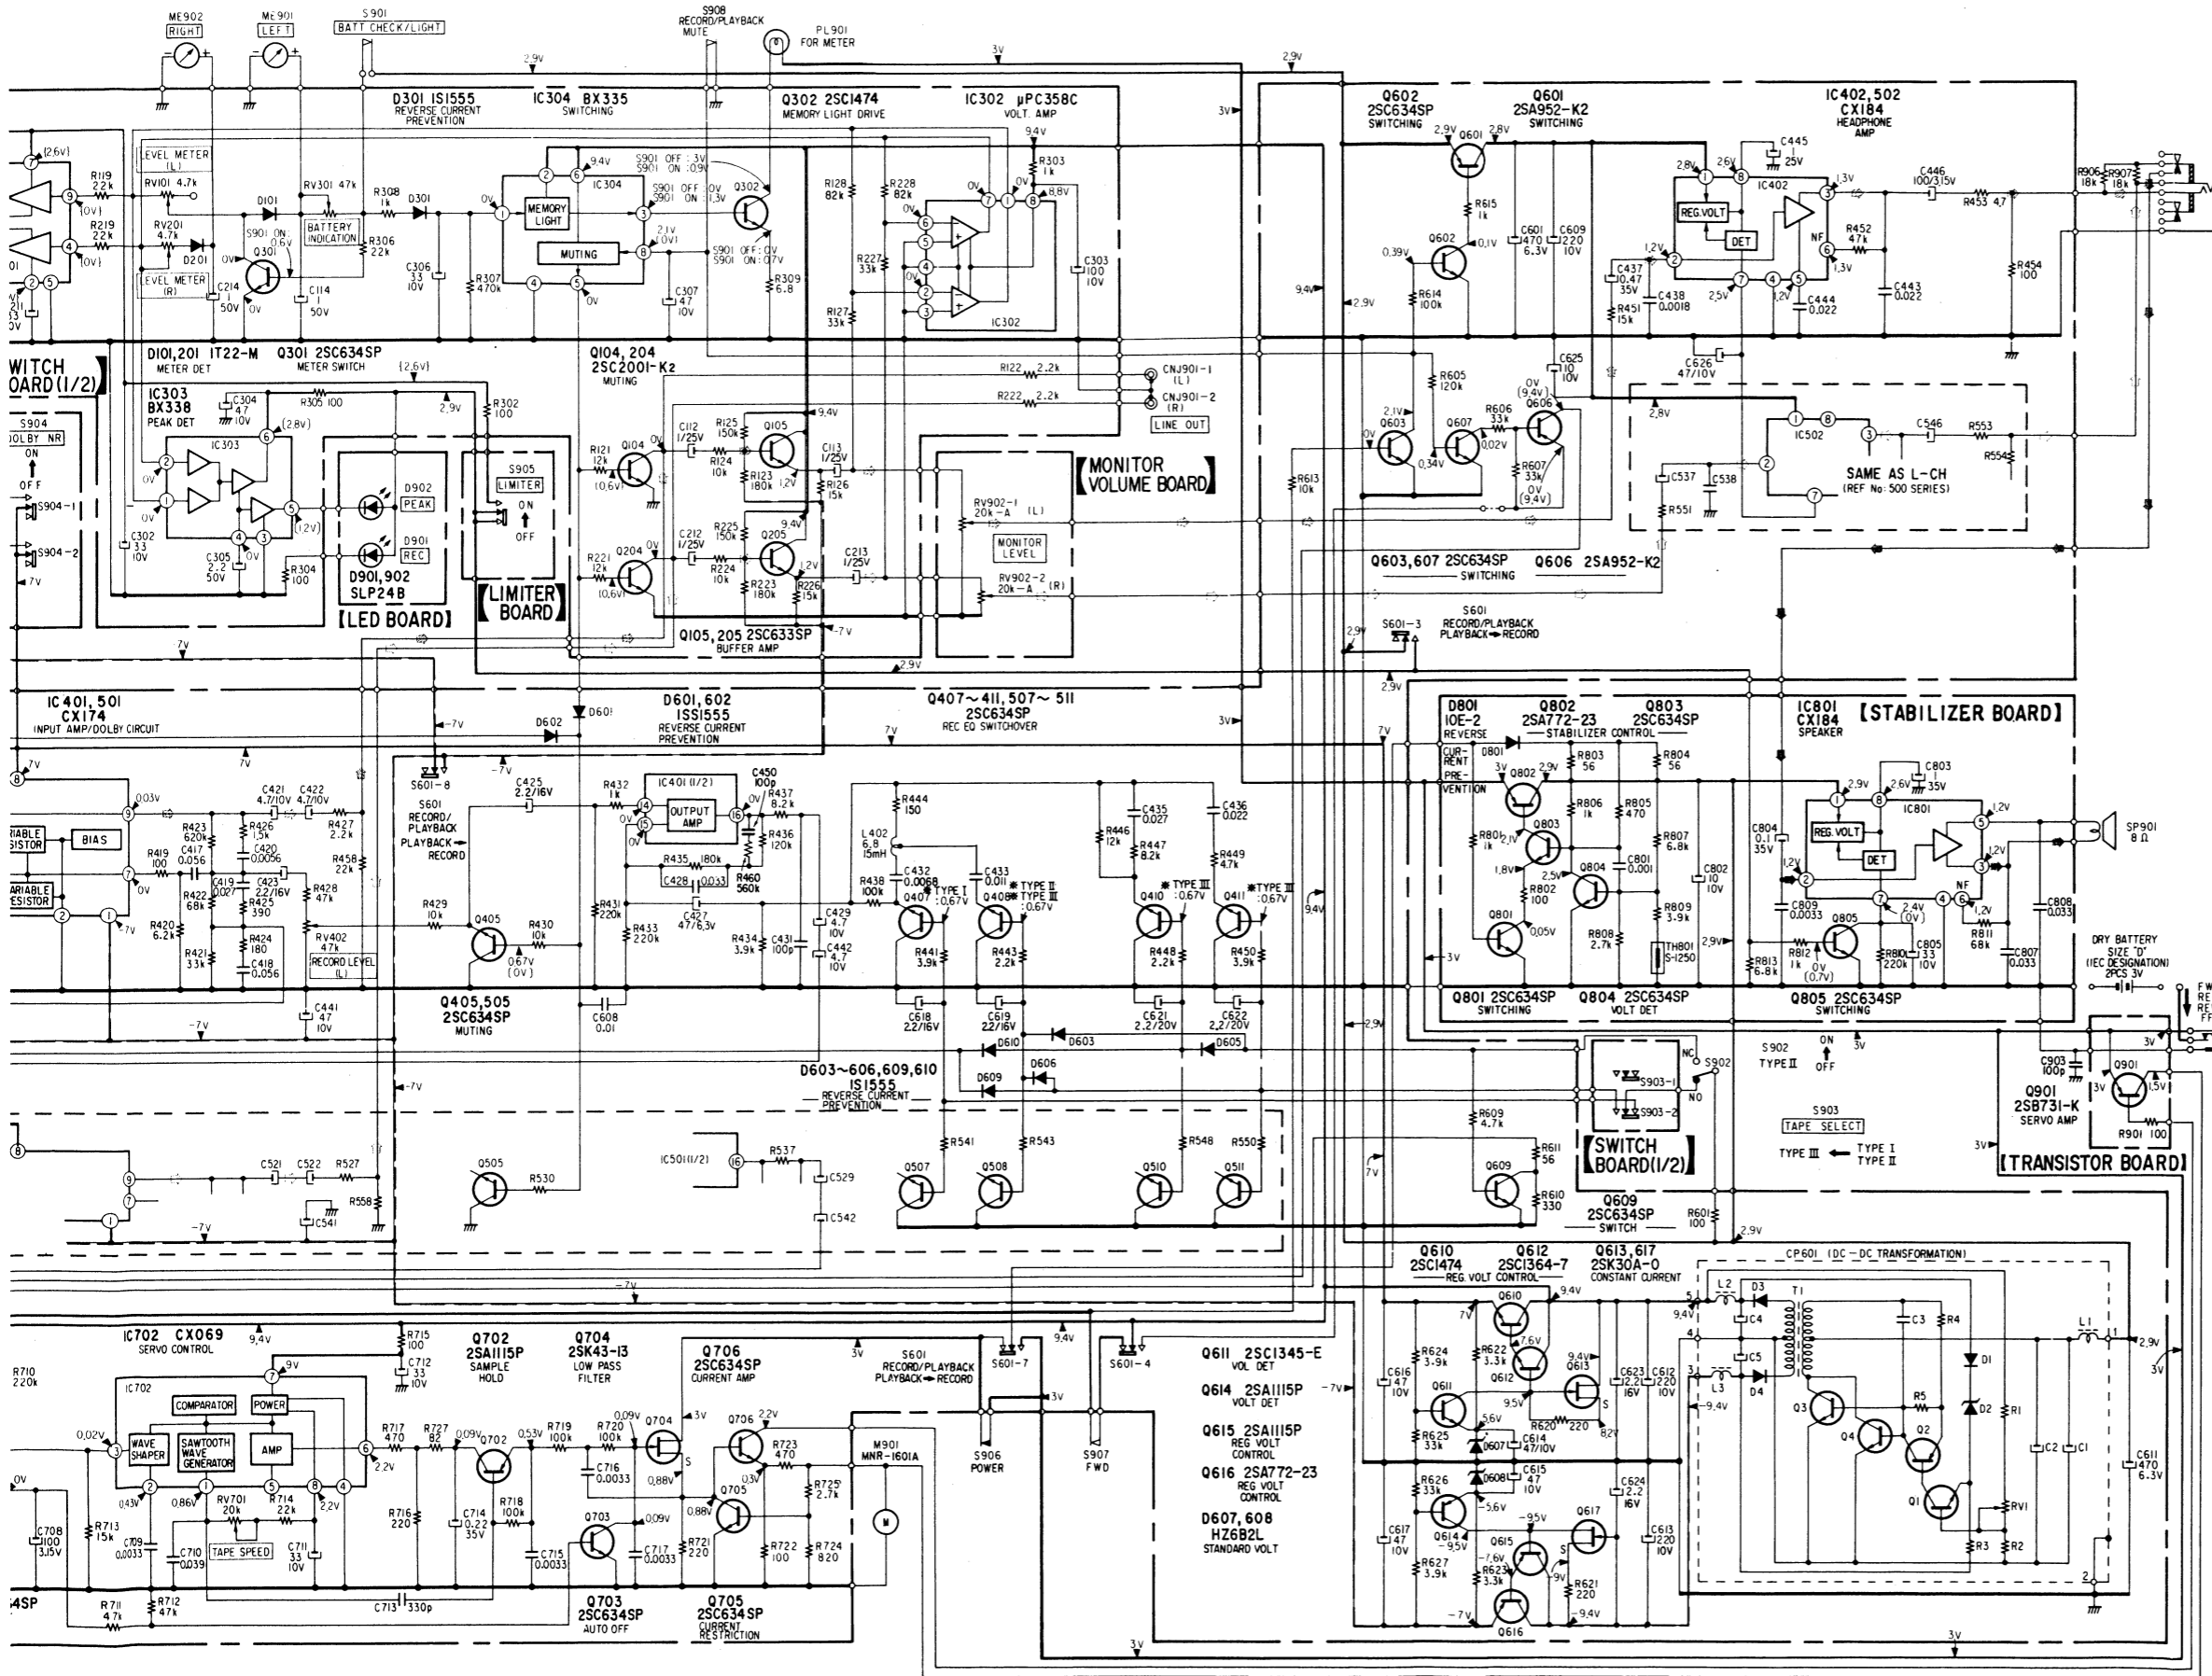



- Note:**
- Components for right channel have same values as for left channel. Reference numbers are coded from 200 or 500.
  - All capacitors are in  $\mu\text{F}$  unless otherwise noted.  $\text{pF} = \mu\mu\text{F}$ . 50VV or less are not indicated except for electrolytics and tantalum.
  - $\Delta$  : internal component.
  - $\square$  : panel designation.
  - $\square$  : adjustment for repair.
  - $\text{---}$  : B+ bus.
  - $\text{---}$  : B- bus.
  - Readings are taken under no-signal conditions with a VOM (20 k $\Omega$ /V).
  - [ ] : record
  - ( ) : FF or REW
  - \* : Value when S902 CrO<sub>2</sub>/METAL, S903 TAPE SELECT) are selected.
  - no mark: playback
  - $\blacktriangleright$  : signal path
  - $\text{---}$  : L-CH signal path
  - $\text{---}$  : R-CH signal path

SECTION 4  
ADJUSTMENTS

4-1. MECHANICAL ADJUSTMENT


Motor Pressure Measurement

Erect the set in a perpendicular condition and push the forward (FWD) button. Pull the spring scale hooked in the position shown below. Slowly touch the flywheel with the motor pulley and read the spring scale just when the flywheel starts rotating.

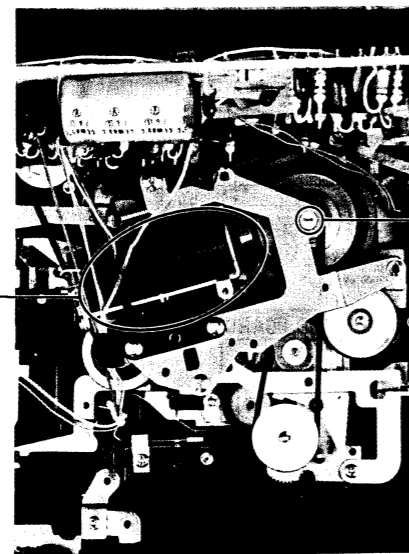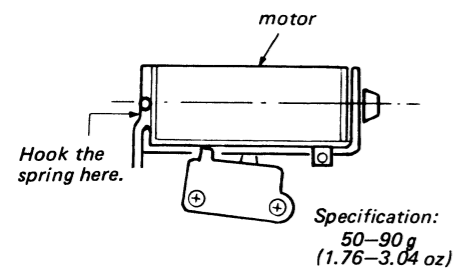

Flywheel Thrust Play Adjustment



Slowly tighten the thrust screw with a screwdriver. Then loosen the thrust screw and adjust the screw position  $1/5-3/5$  turn from the point where the thrust screw touches the capstan shaft. There should be no play. (The clearance should be as in the following figure.)

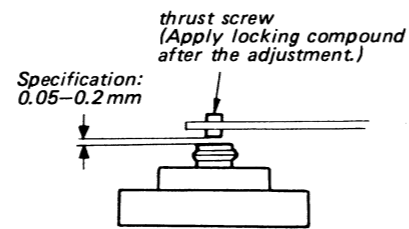

CrO<sub>2</sub> Tape Det Lever Adjustment

Install a cassette tape (besides CrO<sub>2</sub>) and push the CrO<sub>2</sub> tape det lever in the direction of the arrow. Confirm that the clearance between the CrO<sub>2</sub> tape det lever and the cassette is 0.3 mm-0.5 mm.

Return the CrO<sub>2</sub> tape det lever in the original position and confirm that S902 is OFF. (Be sure that the miniature switch lever is pushed.)

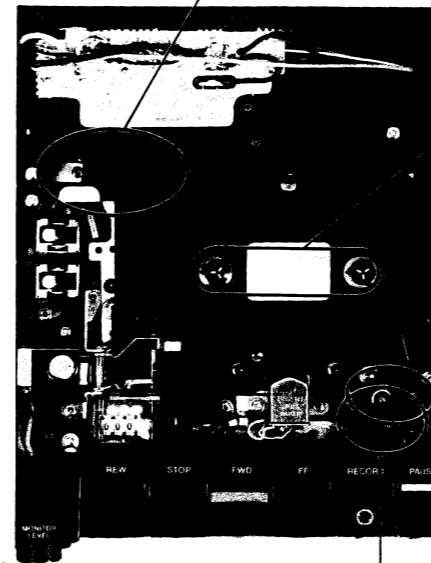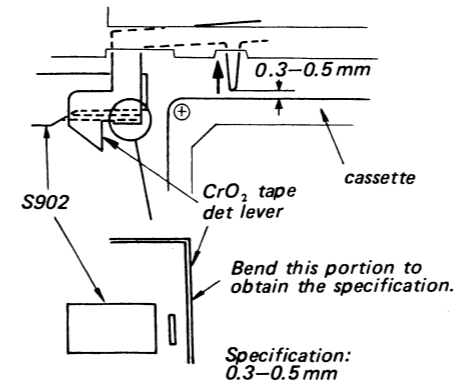


Torques (Reference)

FWD	27 - 50 g·cm (0.37 - 0.68 oz·inch)
FF	more than 80 g·cm (1.11 oz·inch)
REW	more than 70 g·cm (0.97 oz·inch)
back tension	less than 5 g·cm (0.069 oz·inch)

Pinch Roller Pressure Measurement

— Playback Mode —

1. Pull the spring scale.
2. Slowly return the pinch roller and read the spring scale just when the pinch roller starts rotating.

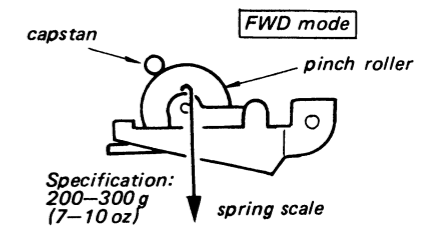


Pause Timing Adjustment

Under locked condition:

Confirm that the take-up reel spindle stops rotating without the tape being in CUE mode after the pinch roller leaves the capstan.

Under released condition:


Confirm that the pinch roller touches the capstan after the take-up reel spindle starts rotating.

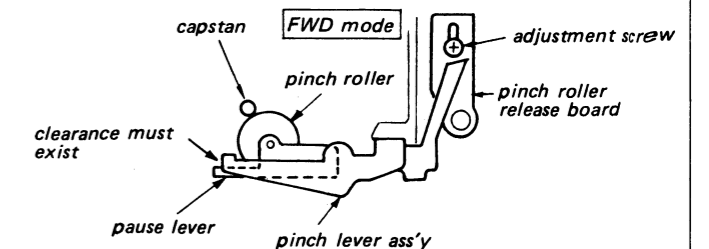

**CrO<sub>2</sub> Tape Det Lever Adjustment**

Install a cassette tape (besides CrO<sub>2</sub>) and push the CrO<sub>2</sub> tape det lever in the direction of the arrow. Confirm that the clearance between the CrO<sub>2</sub> tape det lever and the cassette is 0.3 mm–0.5 mm.

Return the CrO<sub>2</sub> tape det lever in the original position and confirm that S902 is OFF. (Be sure that the miniature switch lever is pushed.)

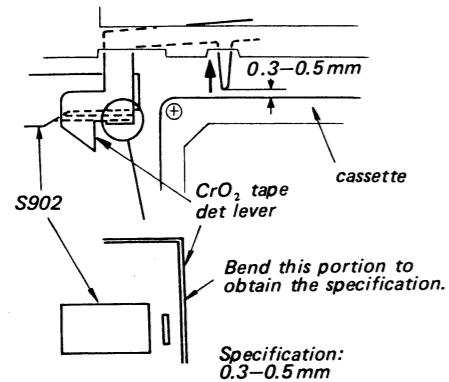


**Torques (Reference)**

FWD	27 – 50 g·cm (0.37 – 0.68 oz·inch)
FF	more than 80 g·cm (1.11 oz·inch)
REW	more than 70 g·cm (0.97 oz·inch)
back tension	less than 5 g·cm (0.069 oz·inch)

**Pinch Roller Pressure Measurement**

– Playback Mode –

1. Pull the spring scale.
2. Slowly return the pinch roller and read the spring scale just when the pinch roller starts rotating.

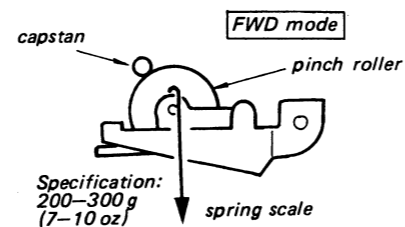


**Pause Timing Adjustment**

Under locked condition:

Confirm that the take-up reel spindle stops rotating without the tape being in CUE mode after the pinch roller leaves the capstan.

Under released condition:

Confirm that the pinch roller touches the capstan after the take-up reel spindle starts rotating.

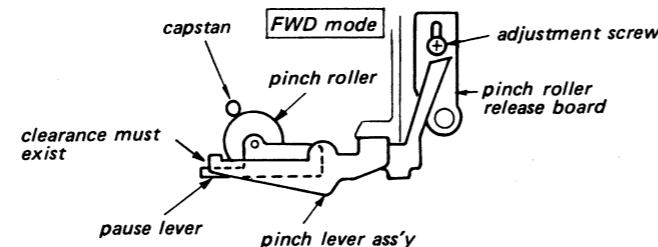

**4-2. ELECTRICAL ADJUSTMENT**

**Note:** The adjustment should be performed in the order given in this service manual. The adjustments should be performed for both L-CH and R-CH.

- Set the TAPE SELECT switch according to the tape as follows.

Tape	TAPE SELECT
CS-121	TYPE I
CS-221	TYPE II
CS-30	TYPE III

- Switches and controls should be set as follows unless otherwise specified.

DOLBY NR switch: OFF  
 TAPE SELECT switch: TYPE I  
 LIMITER switch: OFF  
 MIC ATT switch: 0 dB

- Standard Record

Deliver the standard input signal level to the input jack and set the REC LEVEL control to obtain the standard output signal level.

**Standard Input Level**

	MIC
source impedance	300 Ω
input level	0.77 mV (–60 dB)

**Standard Output Level**

	LINE OUT (FIXED)	HEAD-PHONES
load impedance	47 kΩ	8 Ω
output level	0.44 V (–5 dB)	0.39 V (–6 dB)


**Tape Speed Adjustment**

**Setting:**

MONITOR LEVEL : mechanical mid

**Procedure:**

Mode: playback

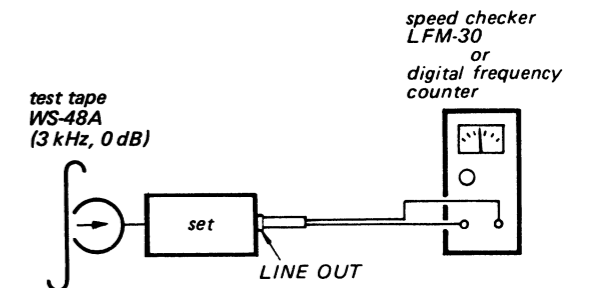


Adjust RV701 so that the tape speed is within the specification around the middle of the tape.

**Specification:**

Speed checker	Digital frequency counter
–0.5 – +0.5 %	2,985 – 3,015 Hz

**Adjustment Location:**

– audio amp board –  
 (conductor side)

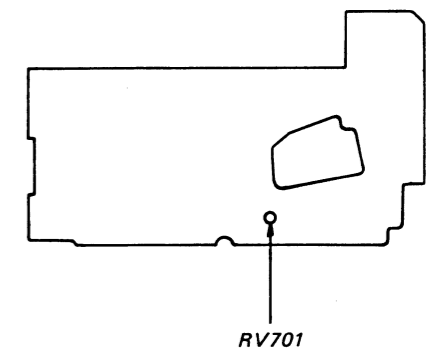

**Record/playback Head Azimuth Adjustment**


Setting:

MONITOR LEVEL : mechanical mid


Procedure:

1. Mode: Playback

test tape  
P-4-A063  
(6.3 kHz, -10 dB)


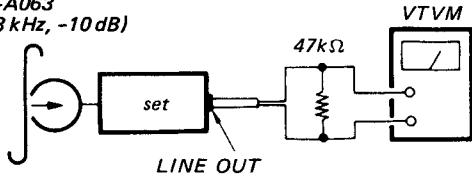


2. Turn the adjustment screw for the maximum output levels. If these levels do not match, turn the adjustment screw where both of output levels match together within 0.5 dB.

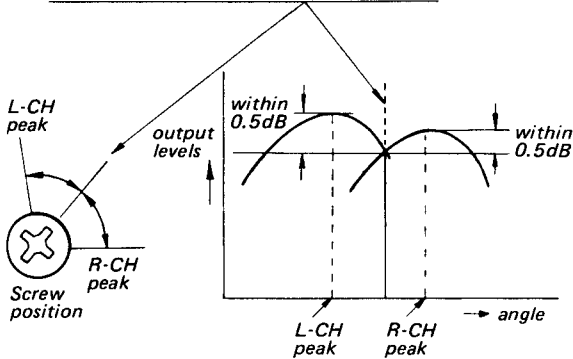

3. Phase Check  
Mode: playback

test tape  
P-4-A063  
(6.3 kHz, -10 dB)

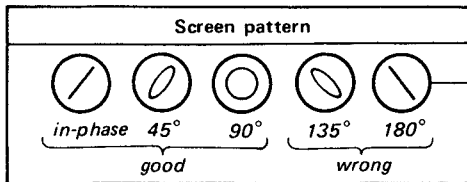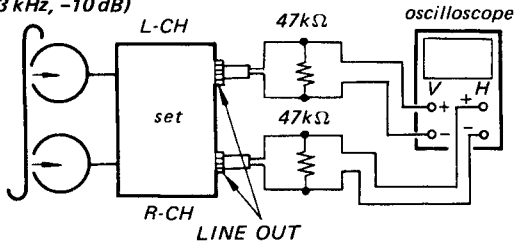


**Playback Level Adjustment**

Procedure:

1. Mode: Playback

test tape  
P-4-L300  
(315 Hz, 0 dB)

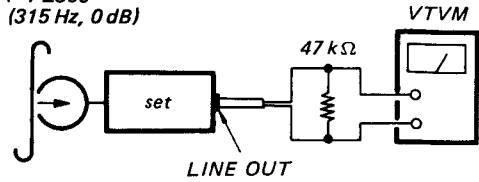


2. Adjust RV401 (L-CH) and RV501 (R-CH) so that the LINE OUT level is within the specification.

Specification:


0.47 V (-4.4 dB)

Adjustment Location:

- audio amp board -  
(conductor side)

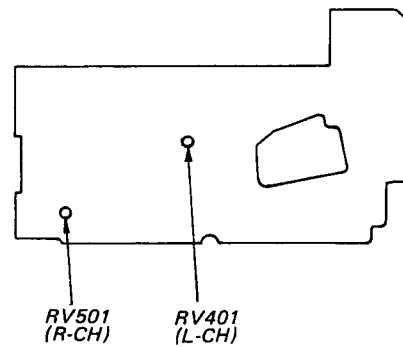

Adjustment Location:

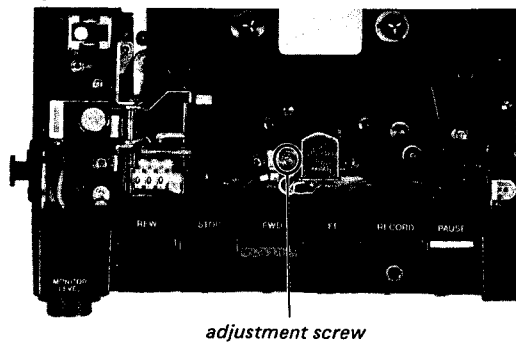


adjustment screw

## Battery Indicator Calibration Adjustment

### Procedure:

Power: 2.2V dc  
 Mode: playback  
 (No cassette tape installed.)

Adjust RV301 so that the pointer of the level meter is positioned as shown below when BATT CHECK/LIGHT button is pushed.



level meter

### Adjustment Location:

— record board —



RV301

## Record Bias Adjustment


### Setting:

TAPE SELECT switch: TYPE I  
 LIMITER switch: OFF


Record 333Hz signal and adjust the REC LEVEL control to obtain -5dB LINE OUT level.

### Procedure:

1. Mode: record

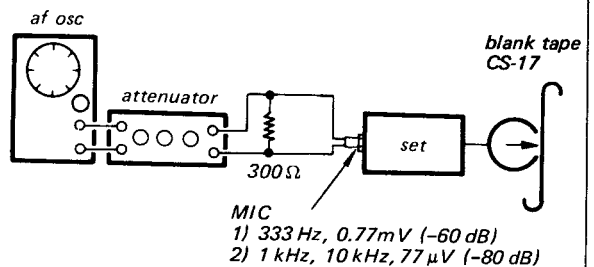

2. Mode: playback

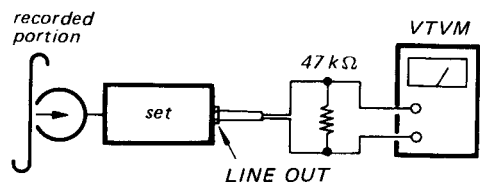

3. Playback 1 kHz, 10 kHz and adjust by changing the pattern to obtain the specified LINE OUT level. (When the specified value cannot be obtained by bridging only one pattern, then bridge another pattern.)

When the 10 kHz output is high  
 → increase the capacitance



When the 10 kHz output is low  
 → decrease the capacitance

### Specification:

Within 10 kHz level difference  $\pm 0.5$  dB relative to 1 kHz.

### Adjustment Location:

— audio amp board —  
 (Conductor Side)

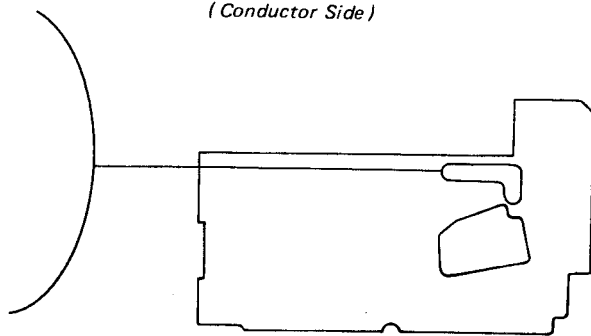


**Record Level Adjustment**

**Setting:**


- MIC ATT switch: 0 dB
- LIMITER switch: OFF
- TAPE SELECT switch: TYPE I
- REC LEVEL control: standard record  
(See page 11.)

**Procedure:**

1. Mode: record

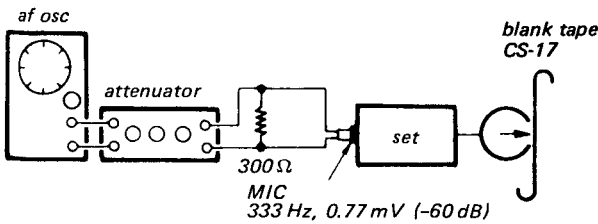

2. Record -60 dB (0.77 mV), 333 Hz signal in a blank tape (CS-17).
3. Playback the recorded tape in step 2.
4. Mode: playback

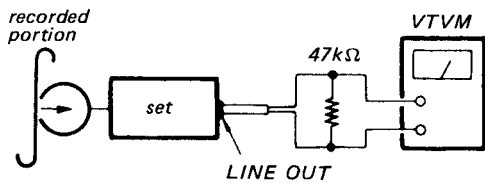


5. Repeat steps 2 and 3 and adjust RV402 (L-CH), RV502 (R-CH) so that the LINE OUT level is -5 dB.
6. Repeat steps 1 to 4 also for CS-26 and obtain the specified value.
7. Install CS-30 and set the TAPE SELECT switch to TYPE III. Then adjust as in step 6.

Tape	Specification	TAPE SELECT
CS-17	-5 dB ± 0.5 dB	TYPE I
CS-26	-5 dB ± 2 dB	TYPE II
CS-30	-5 dB ± 2 dB	TYPE III

**Adjustment Location:**

— audio amp board —

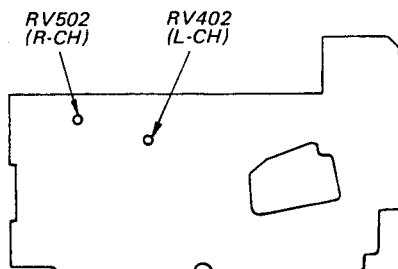


**Meter Level Adjustment**

**Setting:**


- MIC ATT switch: 0 dB
- LIMITER switch: OFF
- REC LEVEL control: standard record  
(See page 11.)

**Procedure:**

1. Mode: record

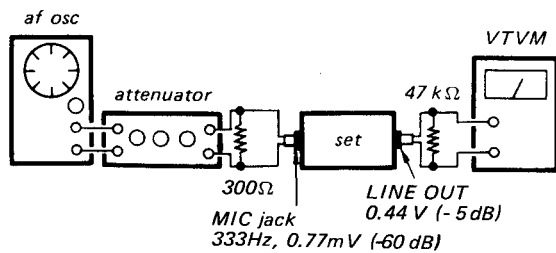


2. Adjust RV101 (L-CH) and RV201 (R-CH) so that the pointer of the level meter points 0dB as shown below.



level meter

**Adjustment Location:**


— record board —

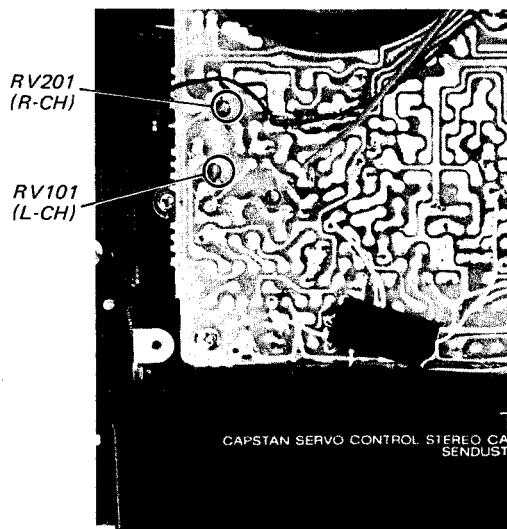



SECTION 5  
EXPLODED VIEWS

Refer to page 5 for notes on screws.

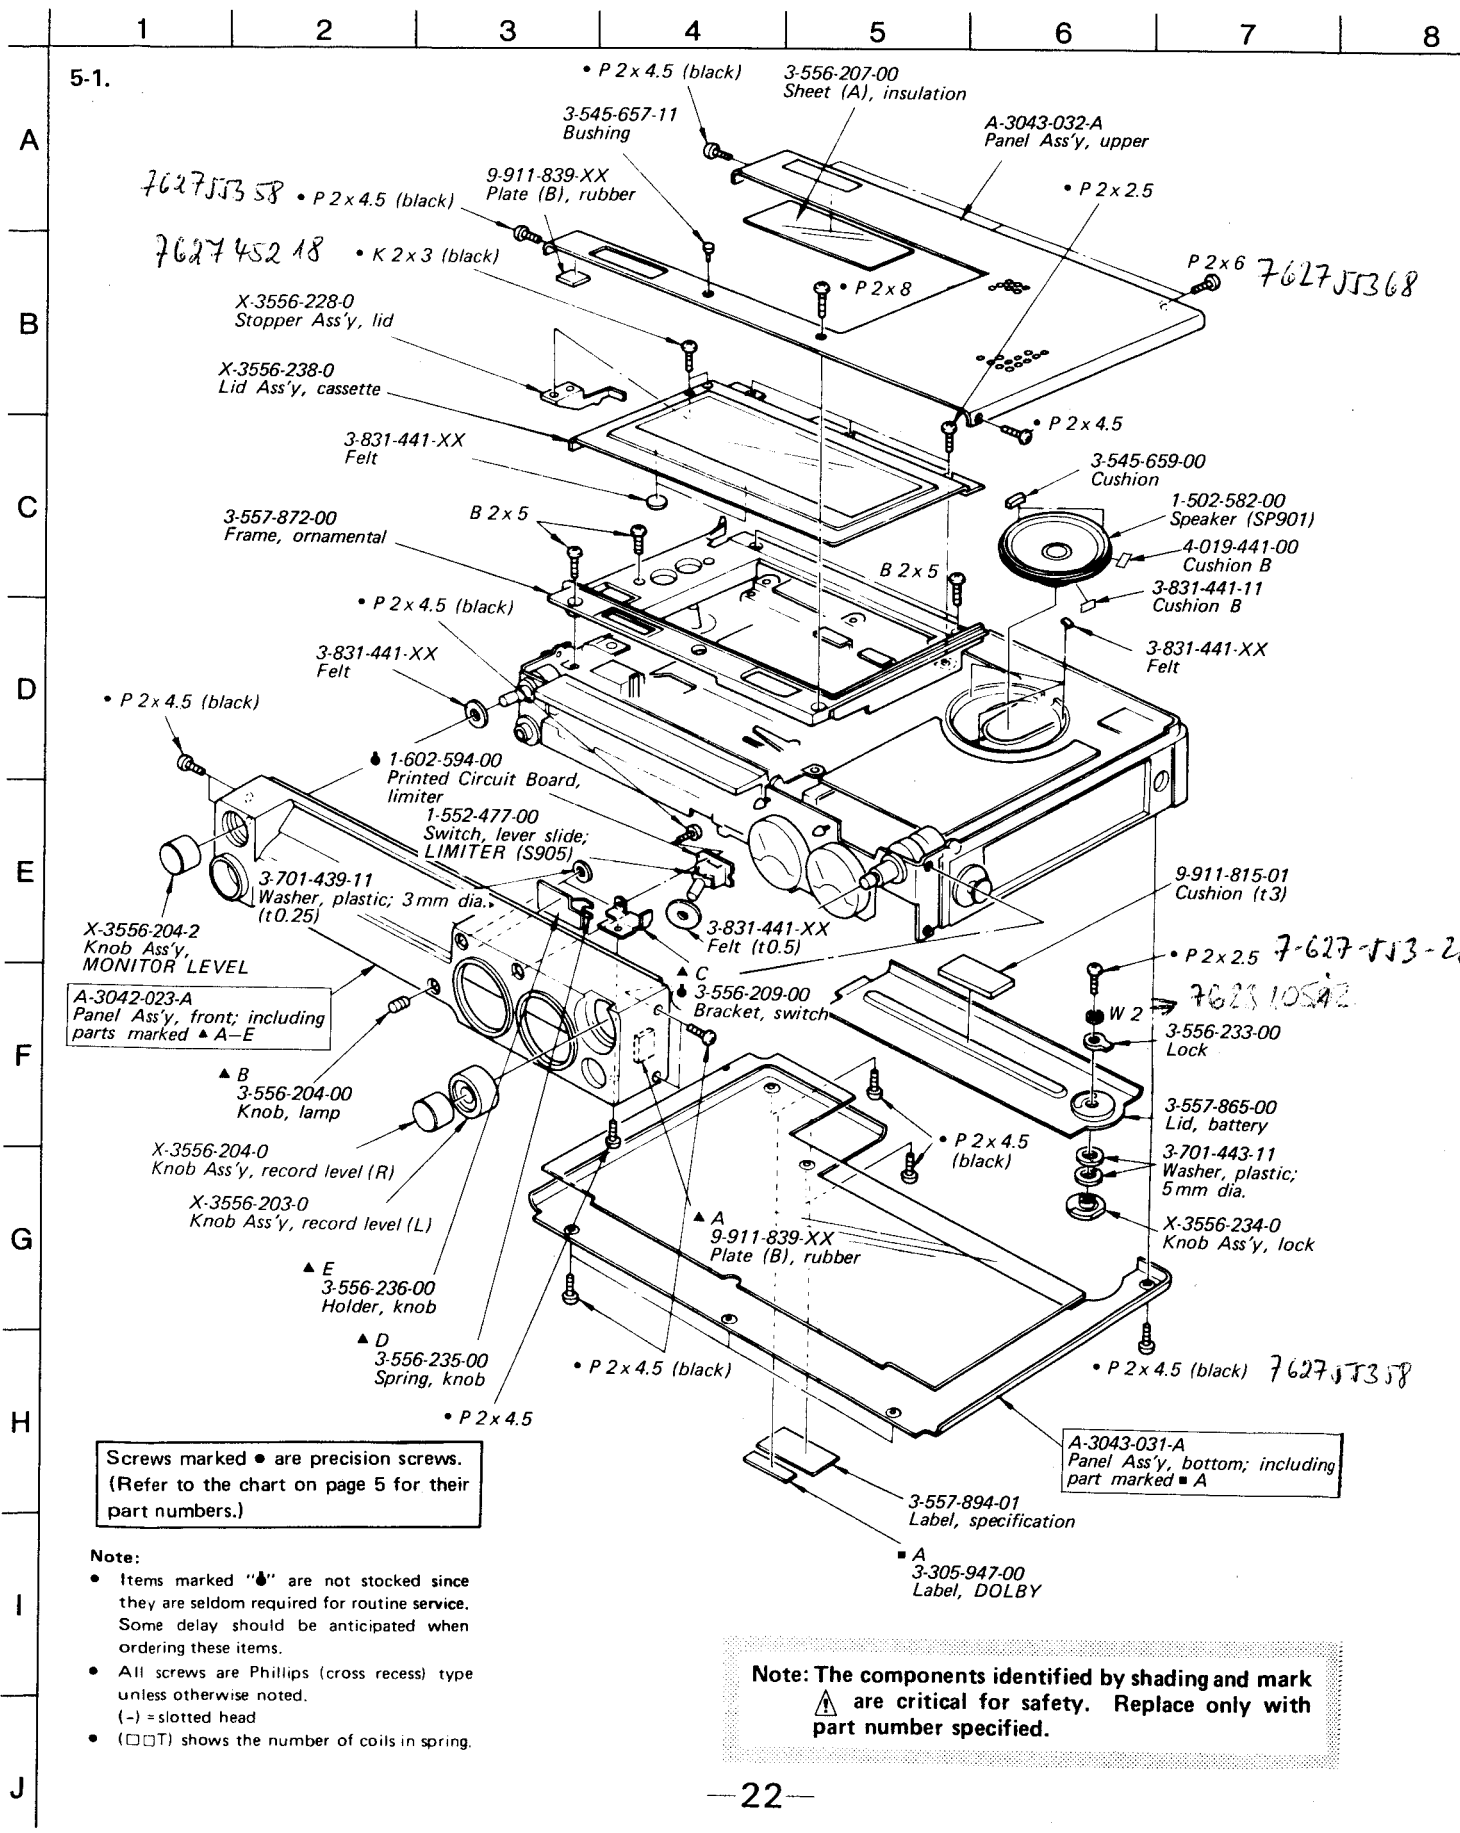

Screws marked • are precision screws. (Refer to the chart on page 5 for their part numbers.)


- Note:
- Items marked "•" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
  - All screws are Phillips (cross recess) type unless otherwise noted. (-) = slotted head
  - (□□T) shows the number of coils in spring.

Note: The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

5-2.

A  
B  
C  
D  
E  
F  
G


—23—

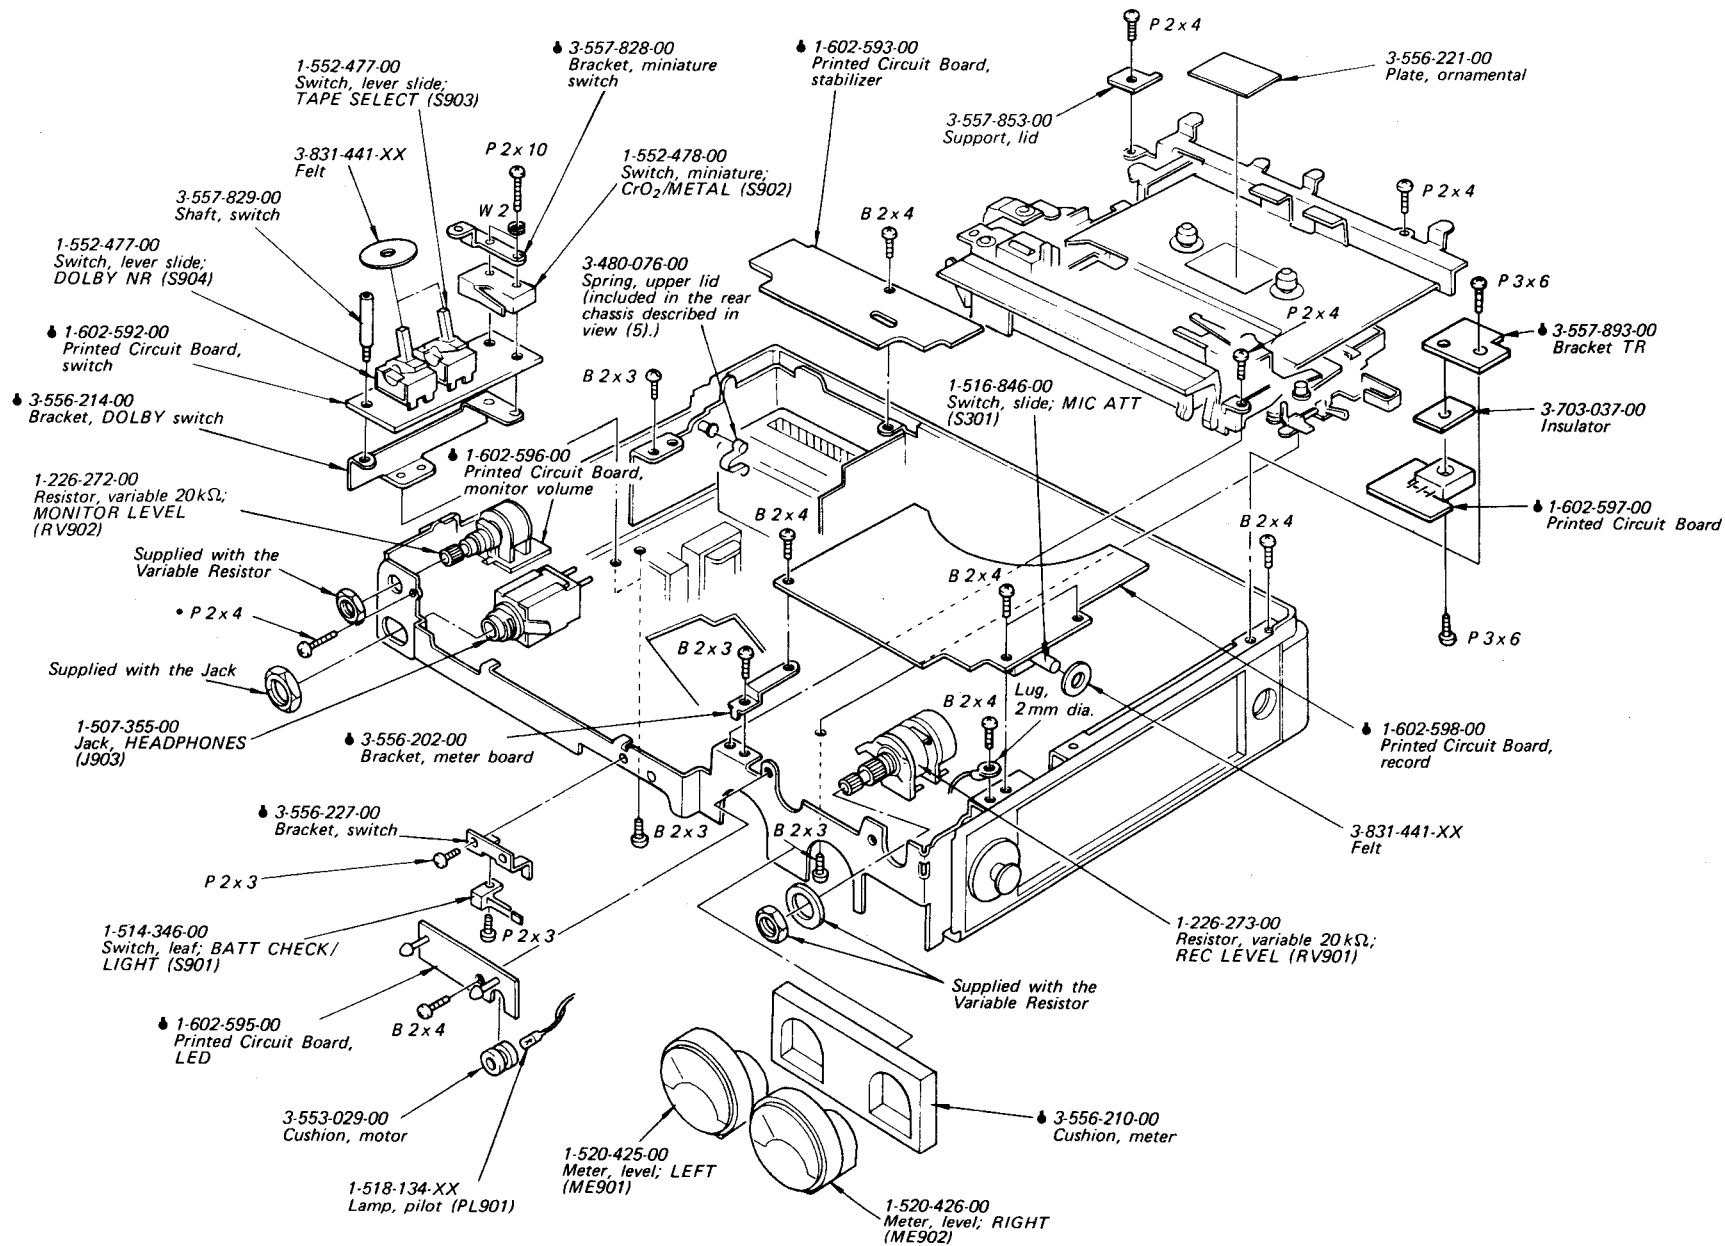

1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F  
G  
H


5-3.

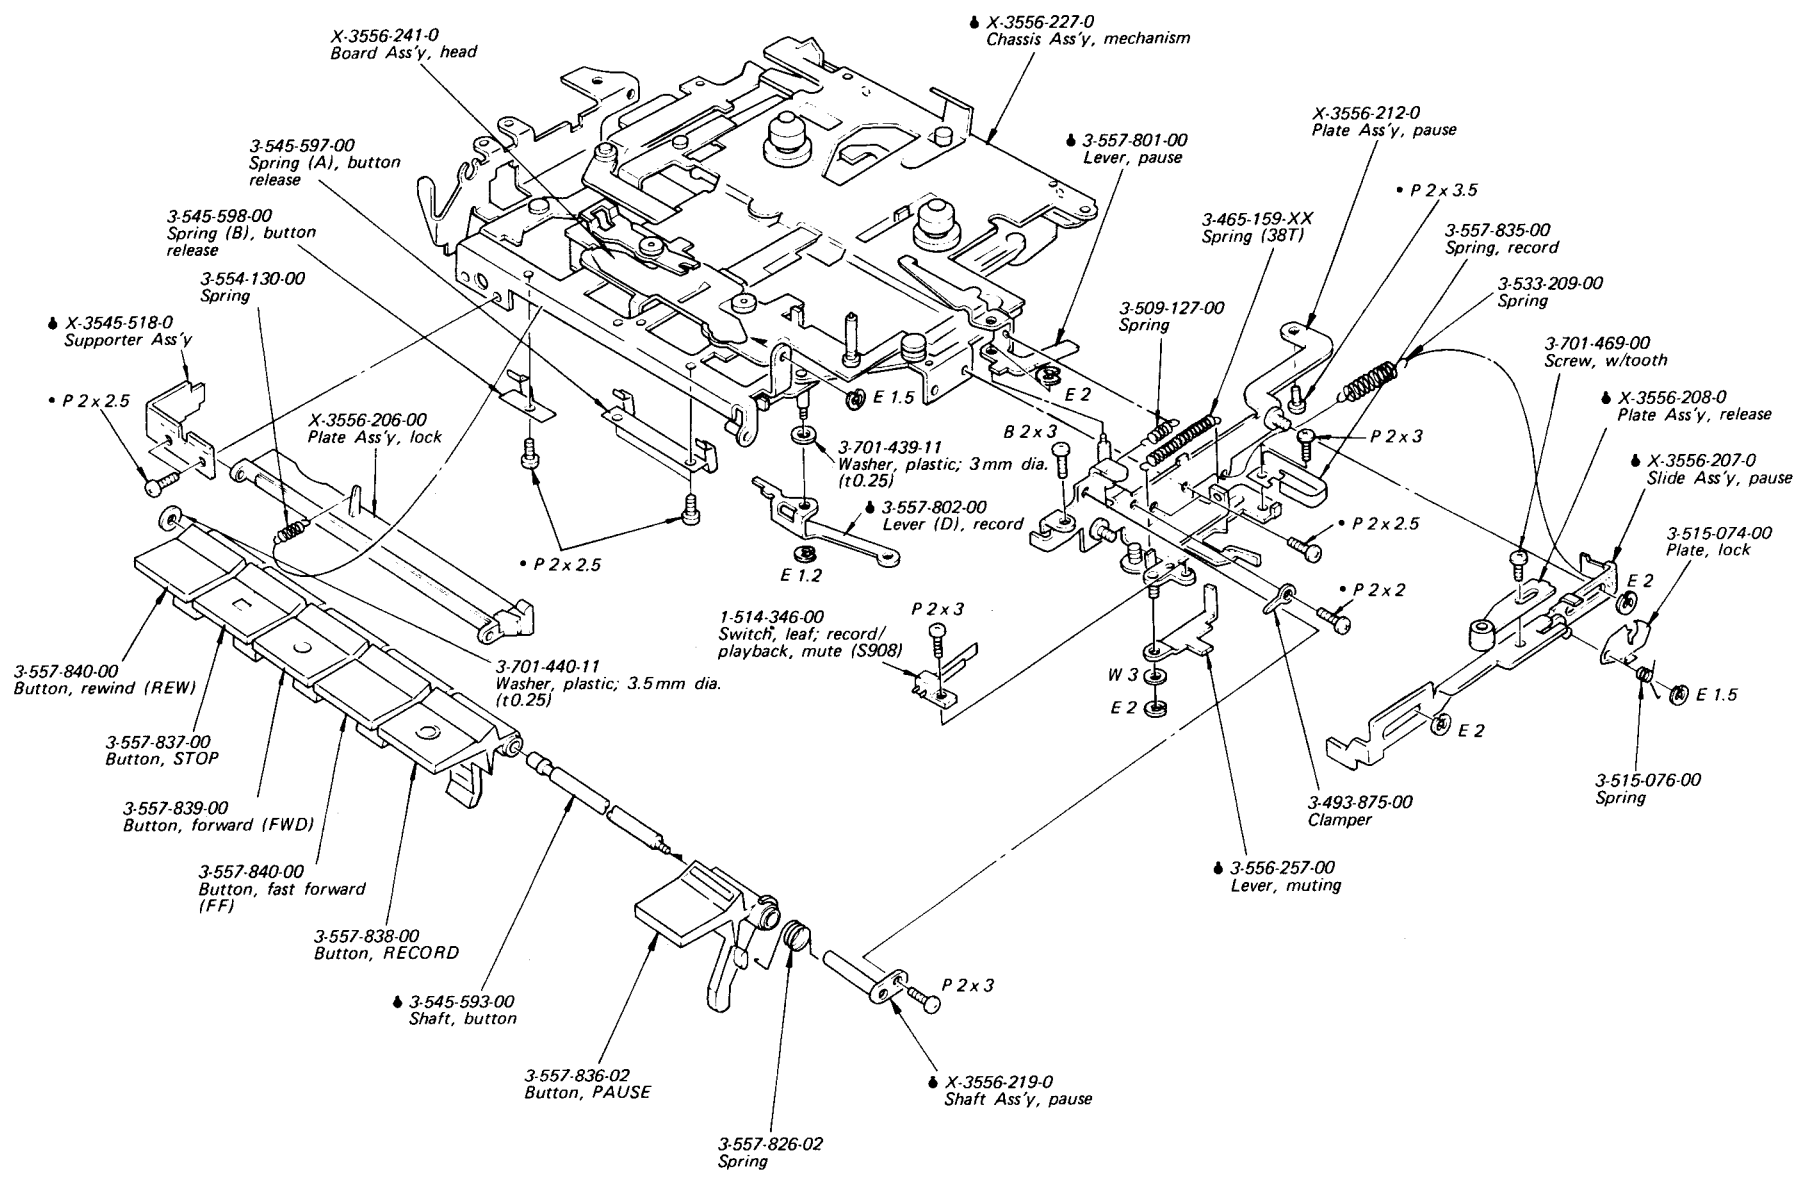


5-4.

A  
B  
C  
D  
E  
F  
G

—25—

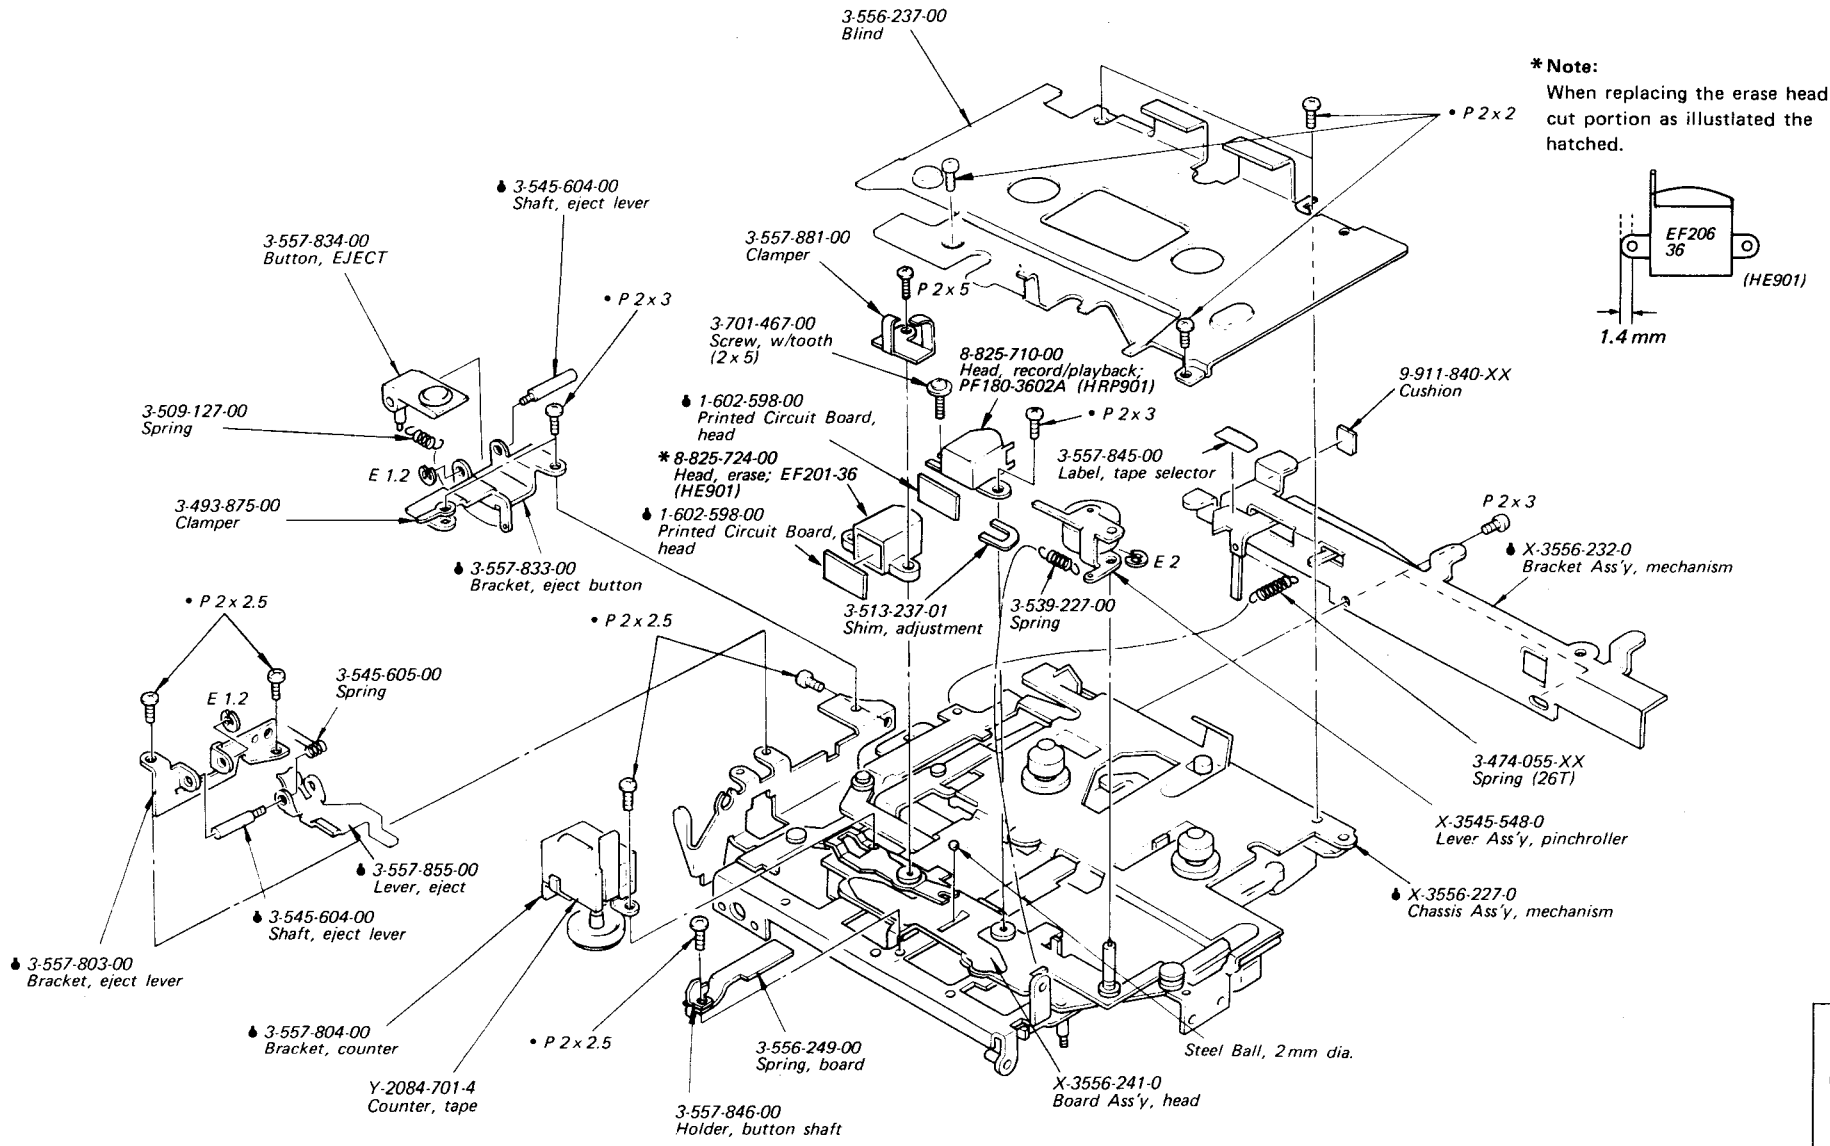

**\* Note:**  
When replacing the erase head cut portion as illustrated the hatched.




A  
B  
C  
D  
E  
F  
G  
H

5-5.

Note:

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
- (-) = slotted head

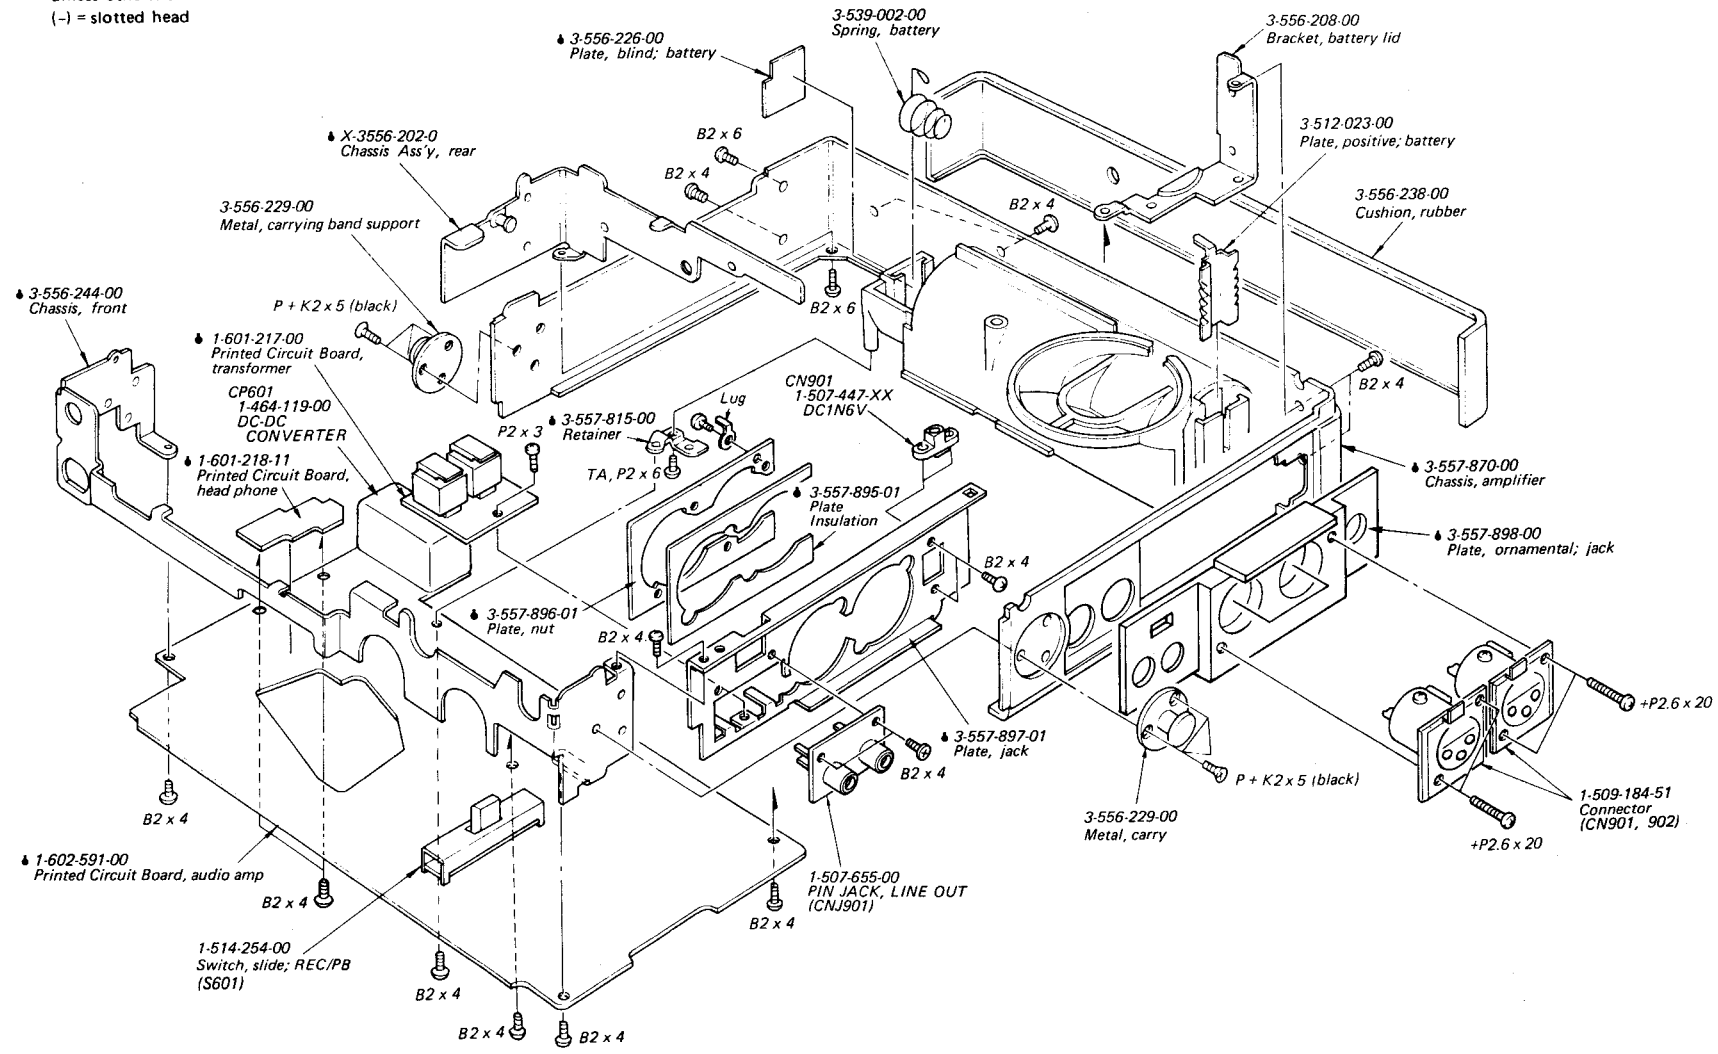



1

2

3

4

5

6

7

8

5-7.

A

B

C

D

E


F

G

H

I

J

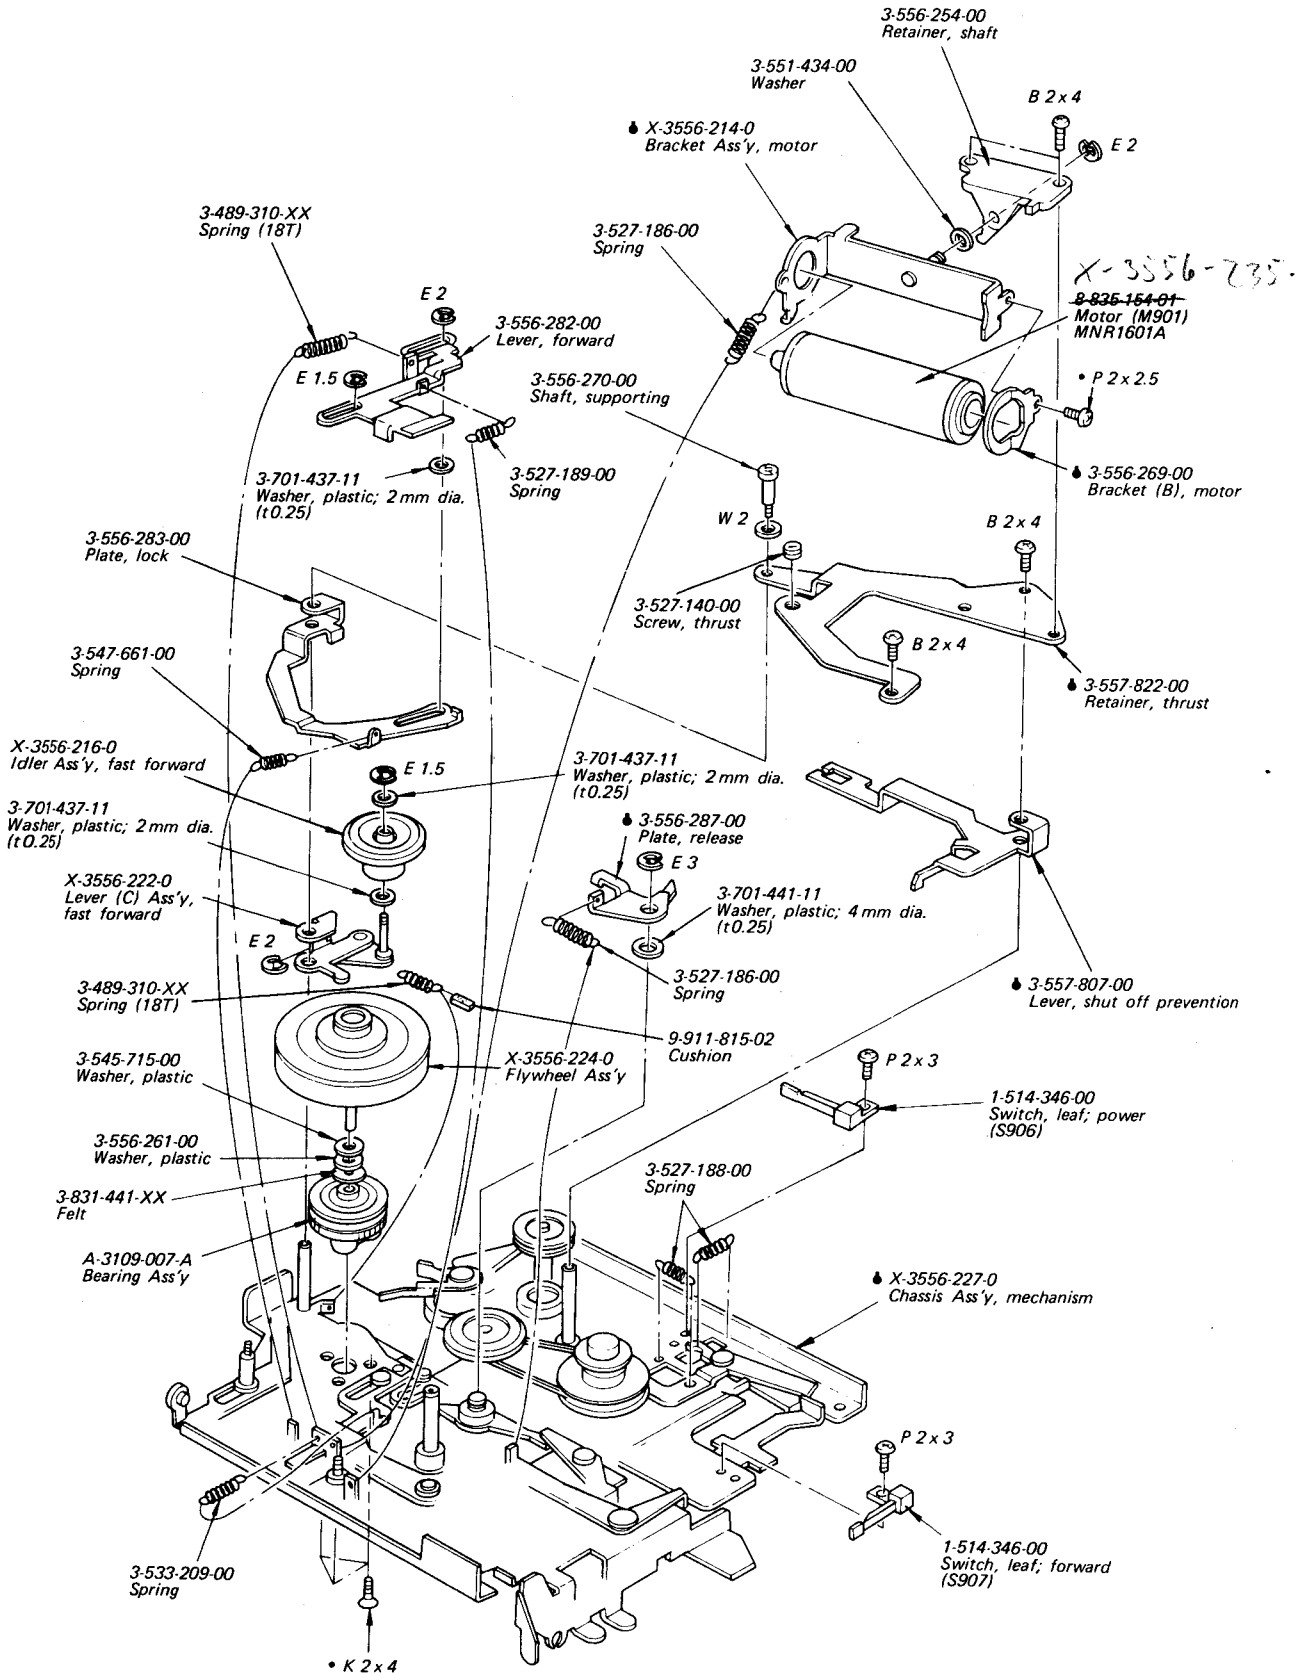



**SECTION 6  
ELECTRICAL PARTS LIST**

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
<b>COMPLETE CIRCUIT BOARDS</b>			Q704	8-723-303-13	2SK43-13
			Q705,706	8-729-600-27	2SC634SP
♣	A-3070-178-A	Audio Amp	Q801	8-729-600-27	2SC634SP
♣	A-3073-024-A	Record	Q802	8-760-523-10	2SA772-23
<b>PRINTED CIRCUIT BOARDS</b>			Q803-805	8-729-600-27	2SC634SP
♣	1-602-592-00	Switch	Q901	8-729-173-13	2SB731
♣	1-602-593-00	Stabilizer	<b>ICs</b>		
♣	1-602-594-00	Limiter	IC301	8-743-370-00	BX337
♣	1-602-595-00	LED	IC302	8-759-135-80	μPC358C
♣	1-602-596-00	Monitor Volume	IC303	8-743-380-00	BX338
♣	1-602-597-00	Transistor	IC304	8-743-350-00	BX335
♣	1-602-598-00	Head	IC401,501	8-759-101-74	CX174
♣	1-601-217-00	Trans	IC402,502	8-751-840-00	CX184
<b>SEMICONDUCTORS</b>			IC701	8-759-135-80	μPC358C
<b>Transistors</b>			IC702	8-750-690-00	CX069A
Q101,201 )	8-729-334-58	2SC1345-E	IC801	8-751-840-00	CX184
Q102,202 )			<b>Diodes</b>		
Q103,203	8-729-600-27	2SC634SP	D101,201	8-719-422-21	1T22AM
Q104,204	8-729-100-13	2SC2001-K2	D301,401 )		
Q105,205	8-729-600-27	2SC634SP	D501	8-719-815-55	1S1555
Q301	8-729-600-27	2SC634SP	D601-606 )		
Q302	8-760-335-10	2SC1474	D607,608	8-719-910-65	HZ6B2L
Q401,501	8-729-600-60	2SA1115P	D609,610	8-719-815-55	1S1555
Q402,502	8-729-334-58	2SC1345E	D801	8-719-200-02	10E2
Q403,503	8-729-600-60	2SA1115P	D901,902	8-719-900-24	SLP24B
Q404,405 )	8-729-600-27	2SC634SP	<b>Magnetic Element</b>		
Q407-411 )			RM701	8-749-016-01	DM-106A
Q412	8-729-600-60	2SA1115P	<b>CAPACITORS</b>		
Q504,505 )	8-729-600-27	2SC634SP	All capacitors are in μF. Common capacitors are omitted.		
Q507-511 )			Refer to the list on pages 31 and 32 for their part numbers.		
Q512	8-729-600-60	2SA1115P	C440,540	1-107-253-00	15+18+22+27p 500V mica
Q601,606	8-729-195-23	2SA952-K2	C606	1-130-062-00	0.0056 630V film
Q602-605 )	8-729-600-27	2SC634SP	C710	1-130-140-00	0.039 100V film
Q607					
Q609	8-729-600-27	2SC634SP			
Q610	8-760-335-10	2SC1474			
Q611	8-729-334-58	2SC1345E			
Q612	8-729-60027	2SC634SP			
Q613,617	8-729-203-02	2SK30A-0			
Q614,615	8-729-600-60	2SA1115P			
Q616	8-760-523-10	2SA772-23			
Q701,703	8-729-600-27	2SC634SP			
Q702	8-729-600-60	2SA1115P			

Items marked "♣" are not stocked because they are seldom required for routine service. Some delay should be anticipated when ordering these items.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
<b>RESISTORS</b>		
All resistors are in ohms. Common ¼W carbon resistors are omitted.		
Refer to the list on page 5 for their part numbers.		
R403,503	1-214-147-00	4.3 k ¼W metal-oxide
R624	1-214-146-00	3.9 k ¼W metal-oxide
R625,626	1-214-168-00	33 k ¼W metal-oxide
R627	1-214-146-00	3.9 k ¼W metal-oxide
R714	1-214-164-00	22 k ¼W metal-oxide
R906,907	1-246-798-00	18 k 1/8W carbon
RV101,201	1-224-251-XX	4.7 k, adjustable; level meter L, R
RV301	1-224-254-XX	47 k, adjustable; battery indication
RV401,501	1-224-252-XX	10 k, adjustable; playback level (L, R)
RV402,502	1-224-254-XX	47 k, adjustable; record level (L, R)
RV701	1-226-490-00	20 k, adjustable; tape speed
RV901	1-226-273-00	20 k-A, variable; REC LEVEL
RV902	1-226-272-00	20 k-A, variable; MONITOR LEVEL

<b>SWITCHES</b>		
S301	1-516-846-00	Slide, MIC ATT
S601	1-514-254-00	Slide, record/playback
S901	1-514-346-00	Leaf, BATT CHECK, LIGHT
S902	1-552-478-00	Miniature, TYPE I
S903,904	1-552-477-00	Lever Slide, TAPE SELECT, DOLBY NR
S905	1-552-477-00	Lever Slide, LIMITER
S906	1-514-346-00	Leaf, POWER
S907	1-514-346-00	Leaf, forward (PLAY)
S908	1-514-346-00	Leaf, record/playback, mute

<b>MISCELLANEOUS</b>		
CN901	1-507-447-XX	Jack, power; DC IN 6V
CNJ901	1-507-655-00	Jack, 2P; LINE OUT
CP601	1-464-119-00	Convertor, dc-dc

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
FL101,201	1-231-388-00	Filter, low pass
HE901	8-825-724-00	Head, erase; EF201-36
HRP901	8-825-710-00	Head, record/playback, PF180-3602A
CN901,902	1-509-184-51	CONNECTOR;
J903	1-507-477-XX	MICROPHONE L, R
L401,501	1-407-879-00	Jack, HEADPHONES
L402,502	1-408-352-00	33 mH, microinductor
	<del>X-3556-235-1</del>	6.8 µH, microinductor
M901	<del>8-825-154-01</del>	Motor (MNR1601A)
ME901	1-520-425-00	Meter, level; LEFT
ME902	1-520-426-00	Meter, level; RIGHT
PL901	1-518-134-XX	Lamp, pilot
SP901	1-502-582-00	Speaker
T901,T902	1-423-242-00	Input, Transformer
T601	1-433-223-00	Transformer, bias osc
TH801	1-800-199-XX	Thermistor
	1-452-130-00	Magnet

### ACCESSORIES AND PACKING MATERIALS

<u>Part No.</u>	<u>Description</u>
X-3556-239-0	Strap Ass'y, carrying
1-551-734-11	Cord, connection (RK-74A)
3-557-874-00	Band, fixed X
3-557-848-00	Box, accessory
3-557-850-00	Cushion
3-557-878-00	Protector (accessory box)
3-701-625-00	Bag, polyethylene (for instruction manual)
3-701-631-00	Bag, polyethylene
3-557-899-00	Carton, individual
3-765-529-11	Manual, instruction

## ELECTROLYTIC CAPACITORS

Note: Circled letter (A to Z) are applicable to European models only.

CAP. (μF)	RATING → : Use the high voltage rated one.					
	6.3 VOLT.	10 VOLT.	16 VOLT.	25 VOLT.	35 VOLT.	50 VOLT.
	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.
0.47					→	1-121-726-00 (A)
1.0					→	1-121-391-00 (A)
2.2					→	1-121-450-00 (A)
3.3	→	→	→	1-121-392-00 (A)	→	1-121-393-00 (A)
4.7	→	→	→	1-121-395-00 (A)	→	1-121-396-00 (A)
10	→	→	1-121-651-00 (A)	1-121-398-00 (A)	→	1-121-738-00 (A)
22	→	→	1-121-479-00 (A)	1-121-480-00 (A)	1-121-662-00 (A)	1-121-152-00 (A)
33	→	→	1-121-403-00 (A)	1-121-404-00 (A)	1-121-652-00 (B)	1-121-405-00 (A)
47	→	1-121-352-00 (A)	1-121-409-00 (A)	1-121-410-00 (A)	1-121-653-00 (B)	1-121-411-00 (A)
100	→	1-121-414-00 (A)	1-121-415-00 (A)	1-121-416-00 (A)	1-121-357-00 (B)	1-121-417-00 (B)
220	1-121-419-00 (B)	1-121-420-00 (B)	1-121-421-00 (A)	1-121-422-00 (B)	1-121-261-00 (C)	1-121-423-00 (B)
330	1-121-751-00 (B)	1-121-805-00 (B)	1-121-521-00 (C)	1-121-654-00 (B)	1-121-655-00 (D)	1-121-656-00 (C)
470	1-121-424-00 (B)	1-121-425-00 (C)	1-121-426-00 (C)	1-121-733-00 (B)	1-121-361-00 (E)	1-121-810-00 (D)
1000	→	1-121-736-00 (C)	1-121-245-00 (D)	1-121-657-00 (D)	1-121-388-00 (E)	1-123-061-00 (E)
2200	1-121-658-00 (B)	1-121-659-00 (C)	1-121-660-00 (D)	1-123-067-00 (F)	1-121-984-00 (F)	-
3300	1-121-661-00 (D)	1-123-075-00 (E)	1-123-071-00 (F)	-	-	-

CAP. (μF)	100 VOLT.	160 VOLT.	250 VOLT.	350 VOLT.
	PART No.	PART No.	PART No.	PART No.
0.47	-	-	-	-
1.0	1-123-249-00 (A)	1-123-252-00 (A)	1-123-003-00 (B)	1-121-168-00 (B)
2.2	1-123-250-00 (A)	1-123-026-00 (B)	-	1-123-028-00 (B)
3.3	1-121-995-00 (A)	-	1-123-004-00 (B)	1-123-006-00 (C)
4.7	1-123-255-00 (A)	1-121-246-00 (B)	1-121-759-00 (B)	1-123-007-00 (D)
10	1-121-126-00 (B)	1-121-999-00 (B)	1-123-254-00 (C)	1-123-008-00 (D)
22	1-121-996-00 (C)	1-123-253-00 (C)	1-123-005-00 (D)	1-123-022-00 (D)
33	1-121-997-00 (C)	1-121-757-00 (C)	-	-
47	1-123-251-00 (C)	1-121-919-00 (C)	-	-
100	1-123-084-00 (E)	-	-	-

## CERAMIC CAPACITORS (A)

CAP. (pF)	RATING						
	50 VOLT.	CAP. (pF)	50 VOLT.	CAP. (pF)	50 VOLT.	CAP. (μF)	50 VOLT.
	PART No.		PART No.		PART No.		PART No.
0.5	1-101-837-00	22	1-102-959-00	150	1-101-361-00	0.001	1-102-074-00
0.75	1-101-586-00	24	1-102-960-00	160	1-101-367-00	0.0012	1-102-118-00
1.0	1-102-934-00	27	1-102-961-00	180	1-102-976-00	0.0015	1-102-119-00
1.5	1-101-576-00	30	1-102-962-00	200	1-102-977-00	0.0018	1-102-120-00
2.0	1-102-935-00	33	1-102-963-00	220	1-102-978-00	0.0022	1-102-121-00
3	1-102-936-00	36	1-102-964-00	240	1-102-979-00	0.0027	1-102-122-00
4	1-102-937-00	39	1-102-965-00	270	1-102-980-00	0.0033	1-102-123-00
5	1-102-942-00	43	1-102-966-00	300	1-102-981-00	0.0039	1-102-124-00
6	1-102-943-00	47	1-101-880-00	330	1-102-820-00	0.0047	1-102-125-00
7	1-102-944-00	51	1-101-882-00	360	1-102-821-00	0.0056	1-102-126-00
8	1-102-945-00	56	1-101-884-00	390	1-102-822-00	0.0068	1-102-127-00
9	1-102-946-00	62	1-101-886-00	430	1-102-823-00	0.0082	1-102-128-00
10	1-102-947-00	68	1-101-888-00	470	1-102-824-00	0.01	1-102-129-00
11	1-102-948-00	75	1-101-890-00	510	1-101-059-00	0.022	1-101-005-00
12	1-102-949-00	82	1-102-971-00	560	1-102-115-00	0.047	1-101-006-00
13	1-102-950-00	91	1-102-972-00	680	1-102-116-00		
15	1-102-951-00	100	1-102-973-00	820	1-102-117-00		
16	1-102-952-00	110	1-102-815-00				
18	1-102-953-00	120	1-102-816-00				
20	1-102-958-00	130	1-101-081-00				

0.001μF = 1,000pF


## CERAMIC (SEMICONDUCTOR) CAPACITORS (A)

CAP. (μF)	RATING → : Use the high voltage rated one.				
	25 VOLT.	50 VOLT.	CAP. (μF)	25 VOLT.	50 VOLT.
	PART No.	PART No.		PART No.	PART No.
0.001	→	1-161-039-00	0.018	1-161-016-00	1-161-054-00
0.0012	→	1-161-040-00	0.022	1-161-017-00	1-161-055-00
0.0015		1-161-041-00	0.027	1-161-018-00	1-161-056-00
0.0018		1-161-042-00	0.033	1-161-019-00	1-161-057-00
0.0022		1-161-043-00	0.039	1-161-010-00	1-161-058-00
0.0027	→	1-161-044-00	0.047	1-161-021-00	1-161-059-00
0.0033	→	1-161-045-00	0.056	→	1-161-060-00
0.0039	→	1-161-046-00	0.068	→	1-161-061-00
0.0047	→	1-161-047-00	0.082	1-161-024-00	1-161-062-00
0.0056	→	1-161-048-00	0.1	1-161-025-00	1-161-063-00
0.0068	→	1-161-049-00			
0.0082	1-161-012-00	1-161-050-00			
0.01	1-161-013-00	1-161-051-00			
0.012	→	1-161-052-00			
0.015	1-161-015-00	1-161-053-00			

## MYLAR CAPACITORS (A)

Note: Circled letters (A) to (Z) are applicable to European models only.


CAP. (μF)	RATING																		
	50 VOLT.			100 VOLT.			200 VOLT.			CAP. (μF)	50 VOLT.			100 VOLT.			200 VOLT.		
	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.		PART No.	PART No.	PART No.	PART No.	PART No.	PART No.			
0.001	1-108-227-00	1-108-365-00	1-108-409-00	0.01	1-108-239-00	1-108-377-00	1-108-421-00	0.1	1-108-251-00	1-108-389-00	1-108-433-00								
0.0012	1-108-351-00	1-108-366-00	1-108-410-00	0.012	1-108-357-00	1-108-378-00	1-108-422-00	0.12	1-108-363-00	1-108-390-00	1-108-434-00								
0.0015	1-108-228-00	1-108-367-00	1-108-411-00	0.015	1-108-240-00	1-108-379-00	1-108-423-00	0.15	1-108-252-00	1-108-391-00	1-108-435-00								
0.0018	1-108-352-00	1-108-368-00	1-108-412-00	0.018	1-108-358-00	1-108-380-00	1-108-424-00	0.18	1-108-364-00	1-108-392-00	1-108-436-00								
0.0022	1-108-230-00	1-108-369-00	1-108-413-00	0.022	1-108-242-00	1-108-381-00	1-108-425-00	0.22	1-108-254-00	1-108-393-00	1-108-437-00								
0.0027	1-108-353-00	1-108-370-00	1-108-414-00	0.027	1-108-359-00	1-108-382-00	1-108-426-00	0.27	1-108-854-00	-	-								
0.0033	1-108-232-00	1-108-371-00	1-108-415-00	0.033	1-108-244-00	1-108-383-00	1-108-427-00	0.33	1-108-855-00	-	-								
0.0039	1-108-354-00	1-108-372-00	1-108-416-00	0.039	1-108-360-00	1-108-384-00	1-108-428-00	0.39	1-108-856-00	-	-								
0.0047	1-108-234-00	1-108-373-00	1-108-417-00	0.047	1-108-246-00	1-108-385-00	1-108-429-00	0.47	1-108-857-00	-	-								
0.0056	1-108-355-00	1-108-374-00	1-108-418-00	0.056	1-108-361-00	1-108-386-00	1-108-430-00	-	-	-	-								
0.0068	1-108-237-00	1-108-375-00	1-108-419-00	0.068	1-108-249-00	1-108-387-00	1-108-431-00	-	-	-	-								
0.0082	1-108-356-00	1-108-376-00	1-108-420-00	0.082	1-108-362-00	1-108-388-00	1-108-432-00	-	-	-	-								



## TANTALUM CAPACITORS

CAP. (μF)	RATING						
	3.15 VOLT.	6.3 VOLT.	10 VOLT.	16 VOLT.	20 VOLT.	25 VOLT.	35 VOLT.
	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.
0.01							1-131-396-00 (B)
0.015							1-131-397-00 (B)
0.022							1-131-398-00 (B)
0.033							1-131-399-00 (B)
0.047							1-131-400-00 (B)
0.068							1-131-401-00 (B)
0.1							1-131-402-00 (B)
0.15							1-131-403-00 (B)
0.22							1-131-404-00 (B)
0.33							1-131-405-00 (B)
0.47							1-131-406-00 (B)
0.68							1-131-407-00 (B)
1.0							1-131-408-00 (B)
1.5							1-131-411-00 (B)
2.2							1-131-412-00 (B)
3.3							1-131-413-00 (B)
4.7							1-131-414-00 (B)
6.8							1-131-417-00 (B)
10							1-131-418-00 (B)
15							1-131-419-00 (B)
22							1-131-415-00 (B)
33							1-131-416-00 (B)
47							1-131-417-00 (B)
68							1-131-418-00 (B)
100							1-131-419-00 (B)
0.01							1-131-396-00 (B)
0.015							1-131-397-00 (B)
0.022							1-131-398-00 (B)
0.033							1-131-399-00 (B)
0.047							1-131-400-00 (B)
0.068							1-131-401-00 (B)
0.1							1-131-402-00 (B)
0.15							1-131-403-00 (B)
0.22							1-131-404-00 (B)
0.33							1-131-405-00 (B)
0.47							1-131-406-00 (B)
0.68							1-131-407-00 (B)
1.0							1-131-408-00 (B)
1.5							1-131-411-00 (B)
2.2							1-131-412-00 (B)
3.3							1-131-413-00 (B)
4.7							1-131-414-00 (B)
6.8							1-131-417-00 (B)
10							1-131-418-00 (B)
15							1-131-419-00 (B)
22							1-131-415-00 (B)
33							1-131-416-00 (B)
47							1-131-417-00 (B)
68							1-131-418-00 (B)
100							1-131-419-00 (B)

## TANTALUM CAPACITORS



CAP. (μF)	RATING					
	3 VOLT.	6.3 VOLT.	10 VOLT.	16 VOLT.	20 VOLT.	35 VOLT.
	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.
0.033						1-131-273-00 (E)
0.047						1-131-274-00 (E)
0.068						1-131-275-00 (E)
0.1						1-131-276-00 (D)
0.15						1-131-277-00 (D)
0.22						1-131-278-00 (D)
0.33						1-131-279-00 (D)
0.47						1-131-280-00 (D)
0.68						1-131-281-00 (D)
1.0						1-131-282-00 (D)
1.5						1-131-283-00 (E)
2.2						1-131-284-00 (E)
3.3						1-131-285-00 (E)
4.7						1-131-286-00 (E)
6.8						1-131-287-00 (E)
10						1-131-288-00 (E)
15						1-131-289-00 (E)
22						1-131-290-00 (E)
33						1-131-291-00 (E)
47						1-131-292-00 (E)
100						1-131-293-00 (E)
0.033						1-131-273-00 (E)
0.047						1-131-274-00 (E)
0.068						1-131-275-00 (E)
0.1						1-131-276-00 (D)
0.15						1-131-277-00 (D)
0.22						1-131-278-00 (D)
0.33						1-131-279-00 (D)
0.47						1-131-280-00 (D)
0.68						1-131-281-00 (D)
1.0						1-131-282-00 (D)
1.5						1-131-283-00 (E)
2.2						1-131-284-00 (E)
3.3						1-131-285-00 (E)
4.7						1-131-286-00 (E)
6.8						1-131-287-00 (E)
10						1-131-288-00 (E)
15						1-131-289-00 (E)
22						1-131-290-00 (E)
33						1-131-291-00 (E)
47						1-131-292-00 (E)
100						1-131-293-00 (E)

Sony Corporation